




Optimal Solutions for the Future

NEW

Lynx 2100 series

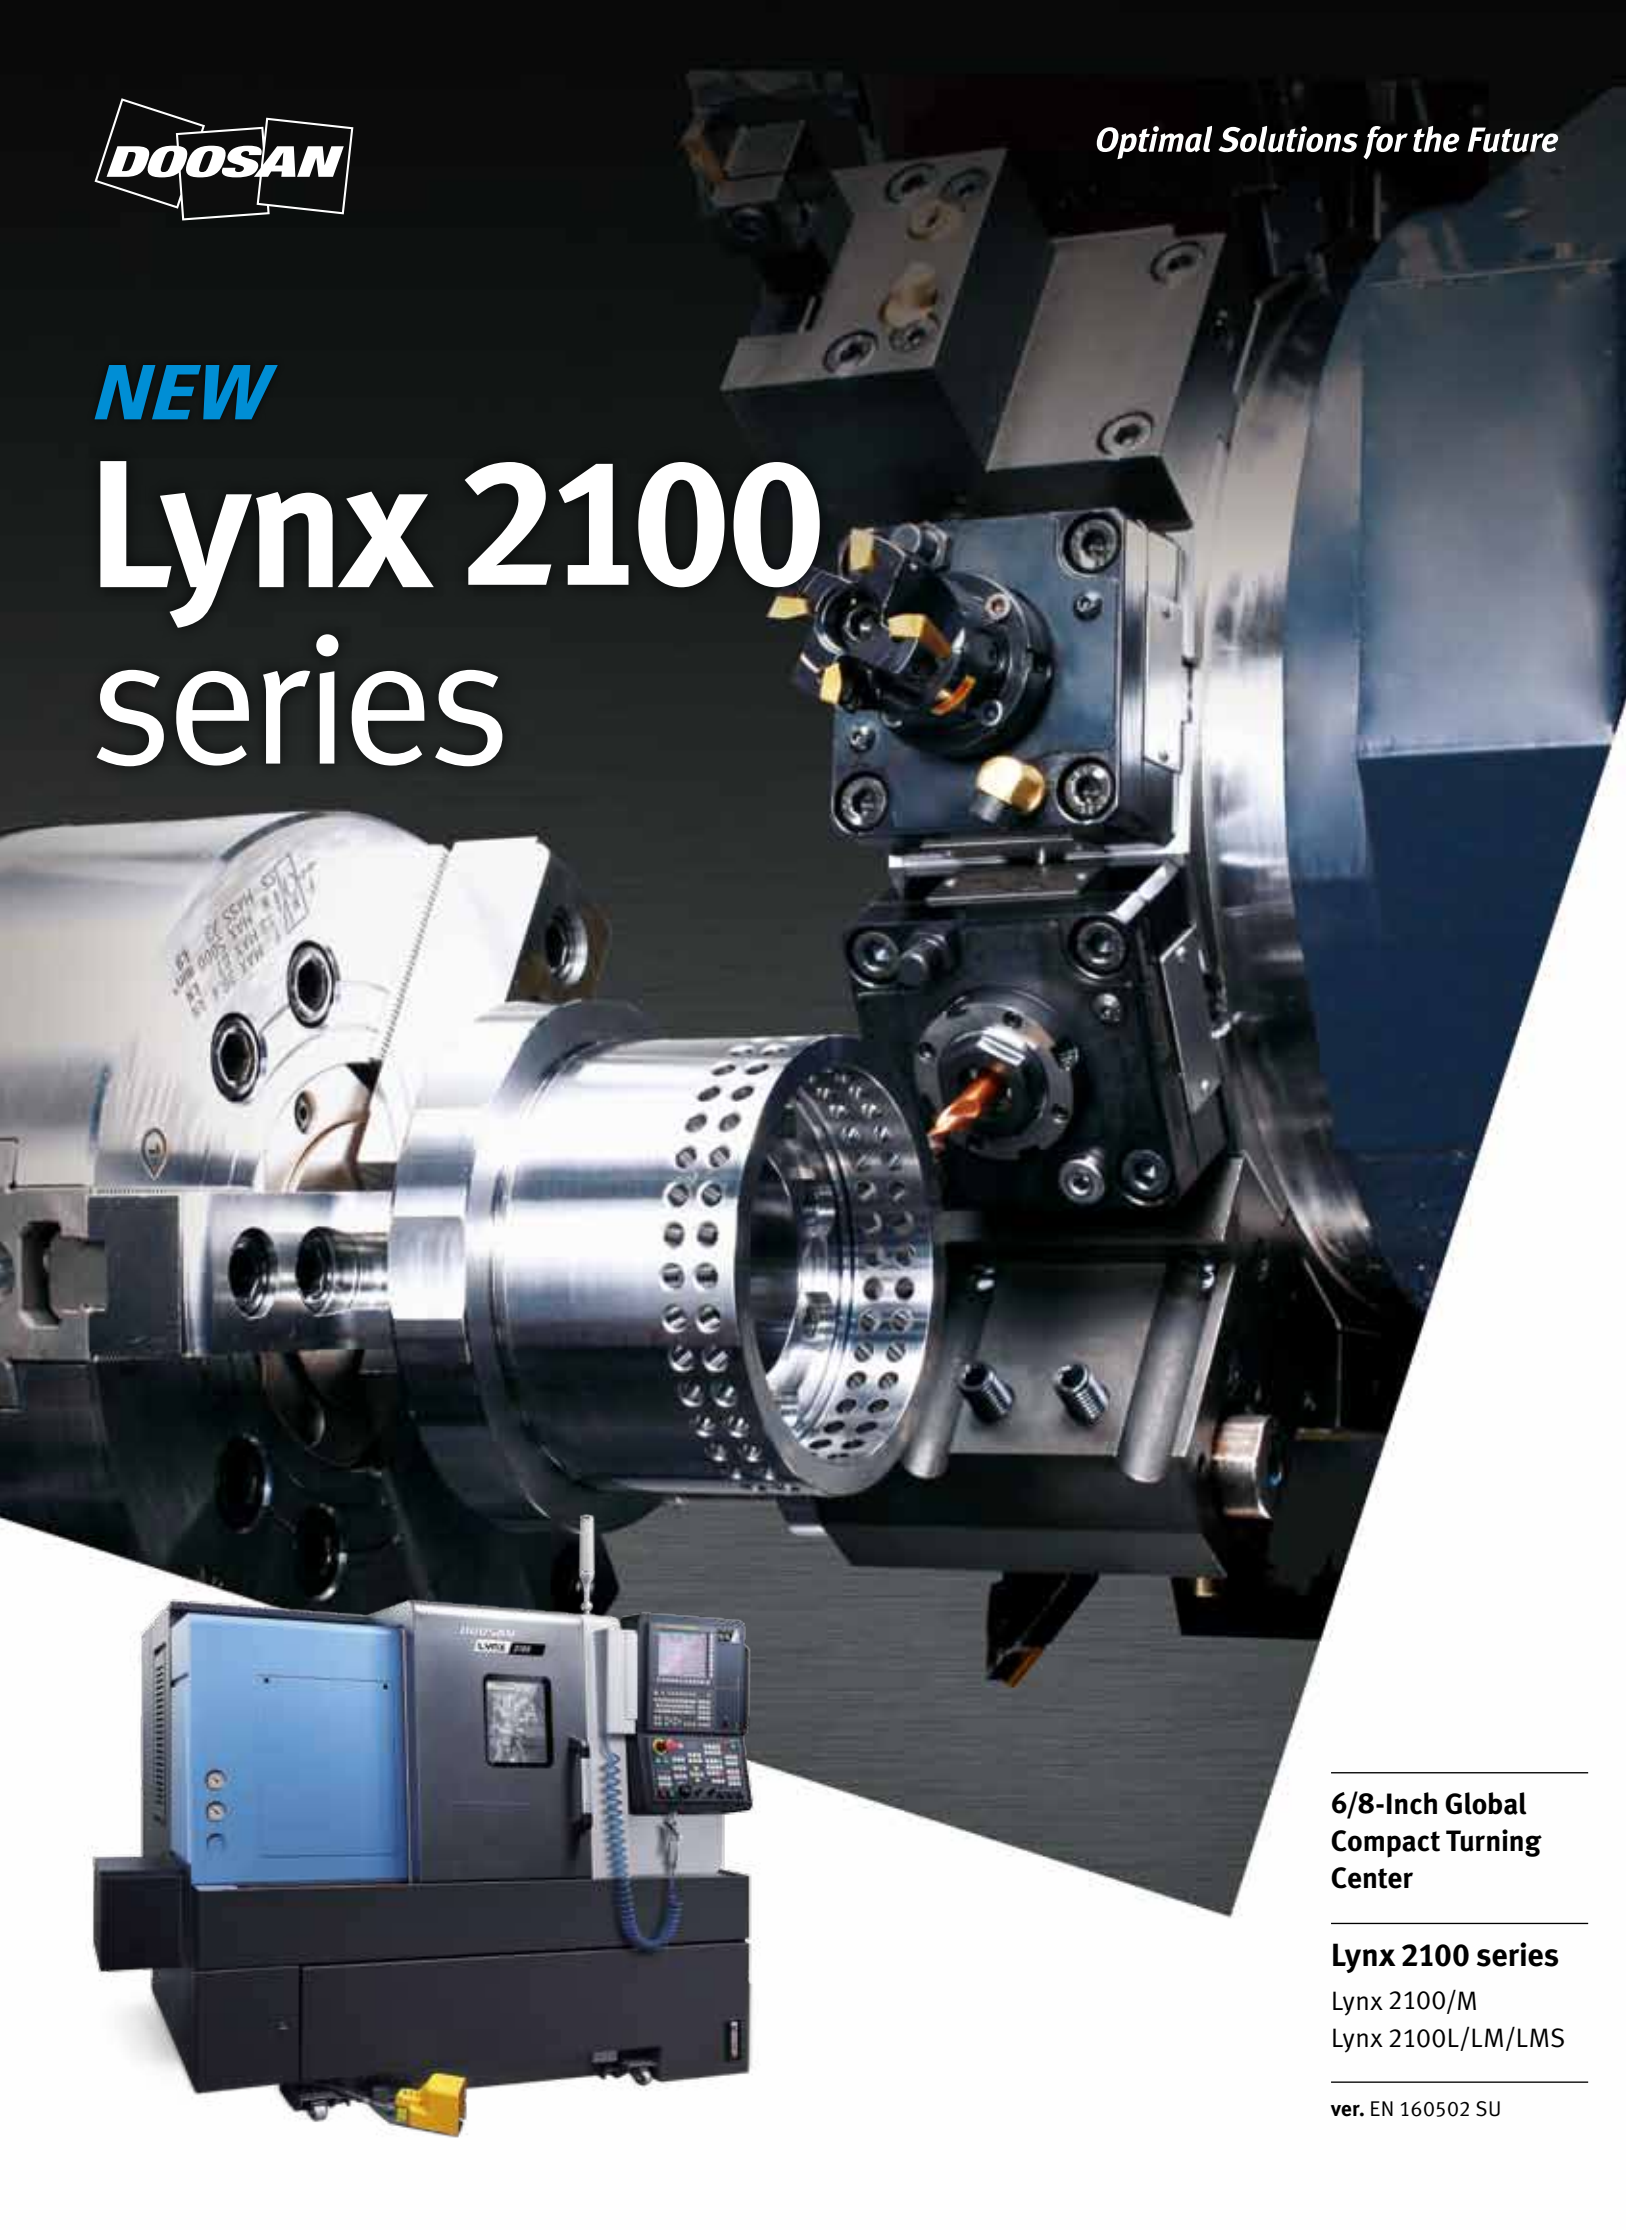

**6/8-Inch Global
Compact Turning
Center**

Lynx 2100 series

Lynx 2100/M
Lynx 2100L/LM/LMS

ver. EN 160502 SU

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service



NEW

Lynx 2100 series

The Lynx 2100 Series – the next generation of the Lynx Series, currently with more than 25000 sales worldwide – aims to deliver even greater customer satisfaction with its superior machining performance, reliability, and user convenience.

Contents

02 Product Overview

Basic Information

04 Basic Structure

08 Cutting Performance

Detailed Information

09 Standard / Optional Specifications

11 Applications

14 Diagrams

25 Machine / CNC Specifications

30 Customer Support Service



Superior Machining Performance

Equipped with a 15 kW (20.1 Hp) high-power motor and machine structure, and further enhanced spindle and axis ball screw stiffness, the Lynx 2100 Series offers excellent cutting capability up to a maximum turning diameter of $\varnothing 350$ mm ($\varnothing 13.8$ inch) and a maximum turning length of 550 mm (21.7 inch).

High Reliability

The Series' excellent reliability is based on the adoption of a wider support structure, more stable bed, low vibration/noise spindle, servo-driven turret, and a full slideway cover for preventing coolant leaks and chips from penetrating the machine.

Improved User Convenience

The CNC tailstock, new Easy Operation Package (EOP) and hot keys enable the user to operate peripheral devices quickly and conveniently. User convenience has been further enhanced with grease type lubrication and a lateral / rear side double-purpose chip conveyor.

Basic Structure

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

The Lynx 2100 Series includes a wider support structure for X, Z axes and tailstock traverse. The X and Z axes are fitted with highly rigid roller-type LM Guideways.




Standard chuck size	Models	Travel mm (inch)		Rapid feedrate m/min		Functions		
		X-axis	Z-axis	X-axis	Z-axis	2-axis	M	MS
6 inch	Lynx 2100A / MA	205 (8.1)	340 (13.4)	30 (1.2)	36 (1.4)	○	○	-
	Lynx 2100LA / LMA / LMSA		560 (22.0)			○	○	○
8 inch	Lynx 2100B / MB	205 (8.1)	340 (13.4)	30 (1.2)	36 (1.4)	○	○	-
	Lynx 2100LB / LMB / LMSB		560 (22.0)			○	○	○

* M : 2-axis + Milling /
MS : Milling + Sub spindle

Largest Machining Area

The Series also offers the largest machining area window in its class, with a max. turning diameter of $\varnothing 350$ mm ($\varnothing 13.8$ inch) and a max. turning length of 550 mm (21.7 inch).

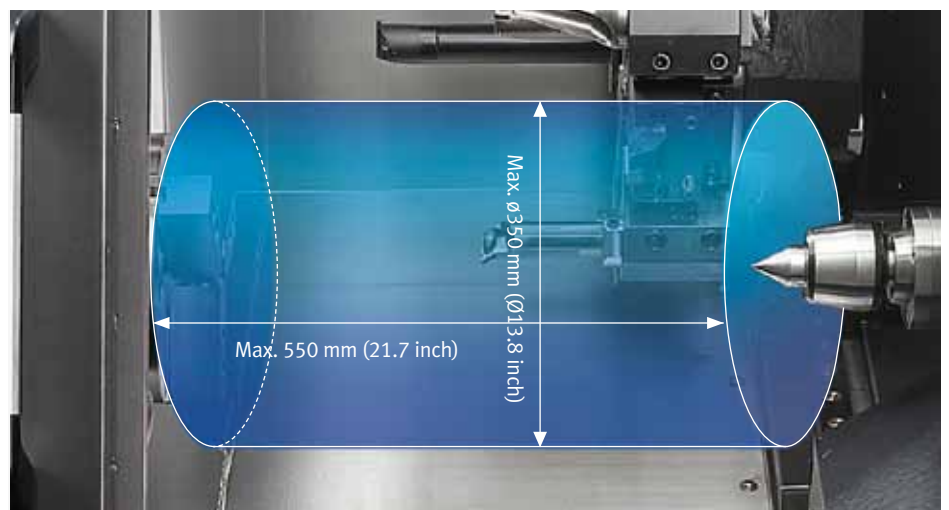

Function	Models	unit	Max. turning dia.	Bar working dia. (6inch / 8inch)	Max. cutting length
2-axis	Lynx 2100A / B	mm (inch)	$\varnothing 350$ ($\varnothing 13.8$)	51 / 65 (2.0 / 2.6)	330 (13.0)
	Lynx 2100LA / LB	mm (inch)	$\varnothing 350$ ($\varnothing 13.8$)	51 / 65 (2.0 / 2.6)	550 (21.7)
M / MS type	Lynx 2100MA / MB	mm (inch)	$\varnothing 300$ ($\varnothing 11.8$)	51 / 65 (2.0 / 2.6)	290 (11.4)
	Lynx 2100LMA / LMB	mm (inch)	$\varnothing 300$ ($\varnothing 11.8$)	51 / 65 (2.0 / 2.6)	510 (20.1)
	Lynx 2100LMSA / LMSB	mm (inch)	$\varnothing 300$ ($\varnothing 11.8$)	51 / 65 (2.0 / 2.6)	510 (20.1)

Spindle

The high power / torque motor supports high-precision and heavy-duty cutting, improving productivity.



Max. Speed
6000 r/min (6 inch)

Max. Torque
169 N·m (8 inch)
(124.7 ft-lbs)

Standard chuck size	Models	Spindle speed r/min	Max.power (15min/cont.) kW (Hp)	Max torque N-m (ft-lbs)
6 inch	Lynx 2100A / LA / MA / LMA / LMSA	6000	15 / 11 (20.1 / 14.7)	127 (93.7)
8 inch	Lynx 2100B / LB / MB / LMB / LMSB	4500	15 / 11 (20.1 / 14.7)	169 (124.7)

Sub-spindle

The sub-spindle function enables rear-side cutting by a single setup, thereby maximizing the user's productivity and efficiency. Full C axis 0.001 degree control is included to optimize capability.



Max. Speed
6000 r/min

Max. Power
5.5 / 3.7 kw (7.4 / 5.0 Hp)

Models	Standard chuck size	Spindle speed r/min	Max.power (15min/cont.) kW	Max torque N-m (ft-lbs)
Lynx 2100LMSA / LMSB	5 inch	6000	5.5 / 3.7 (7.4 / 5.0)	47 (34.7)



Turret

Turret for 2-axis Models_ Lynx 2100A / B / LA / LB

Basic information

- Basic Structure
- Cutting
- Performance

Detailed Information

- Options
- Applications
- Diagrams
- Specifications

Customer Support Service

Rotation of the turret is controlled by servo motor for rapid and accurate selection of tools. The M model is fitted with Doosan's unique BMT45P turret to provide superior performance for milling operations.



No. of Tool Positions

12station

10station option

BMT45P Turret for M/MS Models_ Lynx 2100 MA / MB / LMA / LMB / LMSA / LMSB

The BMT45 turret developed using Doosan's unique technology minimizes thermal error by using an air / oil cooling system. The direct turret clamping system improves accuracy and rigidity.



No. of Tool Positions

12 station

Indexing

24 position index

Tailstock


CNC Tailstock (Hydraulic Type)

Adoption of the hydraulic actuation type CNC tailstock (hydraulic type) enables tailstock positioning and work setting using the operation panel. The dedicated screen reduces the work setting time by about 50%.



Models	Tail stock travel mm (inch)	Std. / Opt.
Lynx 2100A / B / MA / MB	360 (14.2)	option
Lynx 2100LA / LB / LMA / LMB	580 (22.8)	Std.

The EOP (Easy Operation Package) System enables fast and easy tailstock position setting and control.

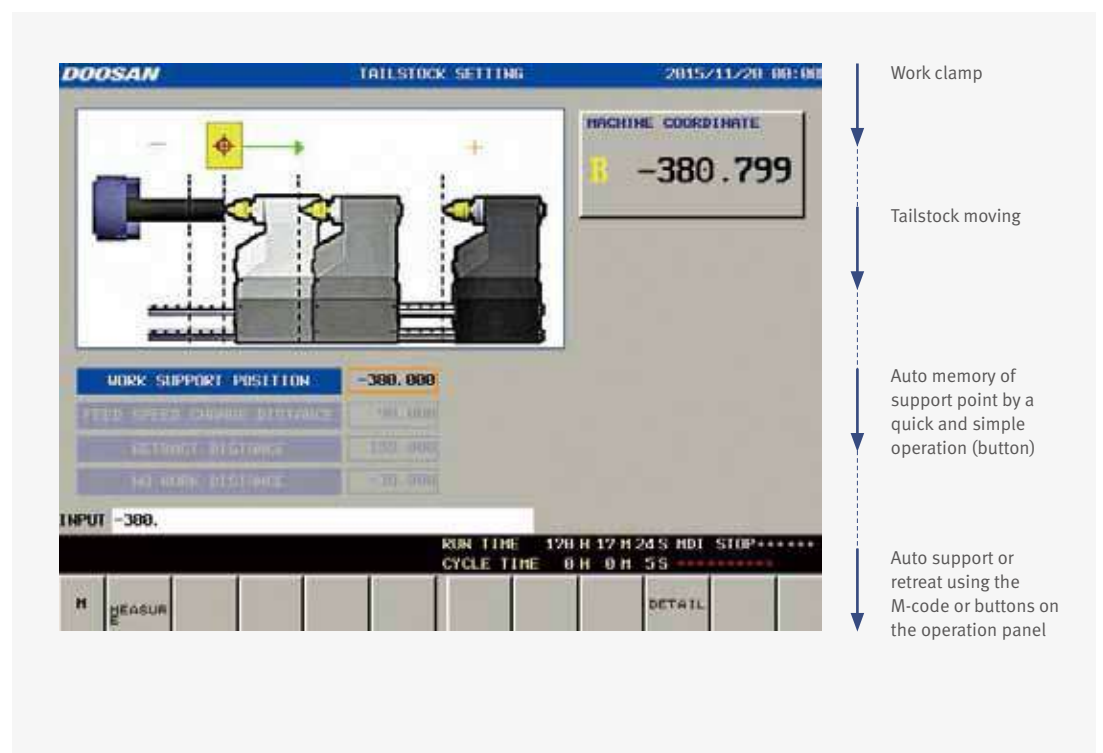

Cutting Performance

Basic information

Basic Structure
Cutting
Performance

Lynx 2100 series has powerful cutting performance.

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service



O.D turning

	Unit	Lynx 2100LB
Cutting speed	m/min (ipm)	210 (8267.7)
Feed	mm/rev (ipr)	0.56
Spindle speed	r/min	844
Cutting depth	mm (inch)	4 (0.2)
Chip removal rate	cm ³ /min (inch ³ /min)	462 (28.2)



I.D turning (Rough / End)

	Unit	Lynx 2100LB
Cutting speed	m/min (ipm)	280 / 200 (11023.6 / 7874.0)
Feed	mm/rev (ipr)	0.3 / 0.1 (0.0 / 0.0)
Spindle speed	r/min	1182 / 863
Cutting depth	mm (inch)	3 / 0.4 (0.1 / 0.0)
Tool length	mm (inch)	4.0D / 4.0D (0.2D / 0.2D)



U-drilling

	Unit	Lynx 2100LB
Cutting speed	m/min (ipm)	200 (7874.0)
Feed	mm/rev (ipr)	0.12 (0.0)
Spindle speed	r/min	1011
U-drill dia.	mm (inch)	63 (2.5)
Cutting depth	mm (inch)	176 (6.9)
Chip removal rate	cm ³ /min (inch ³ /min)	378 (23.1)



Face milling

	Unit	Lynx 2100MA
Cutting speed	m/min (ipm)	188 (7401.6)
Feed	mm/min (ipm)	600 (23.6)
Spindle speed	r/min	1500
Cutting depth	mm (inch)	3 (0.1)
Chip removal rate	cm ³ /min (inch ³ /min)	57.6 (3.5)
Tool dia.	mm (inch)	50 (2.0)



End milling

	Unit	Lynx 2100MA
Cutting speed	m/min (ipm)	57 (2244.1)
Feed	mm/min (ipm)	300 (11.8)
Spindle speed	r/min	1500
Cutting depth	mm (inch)	30 (1.2)
Chip removal rate	cm ³ /min (inch ³ /min)	108 (6.6)
Tool dia.	mm (inch)	12 (0.5)



Tap

	Unit	Lynx 2100MA
Tap dia.	mm (inch)	10 (0.4)
Cutting speed	m/min (ipm)	60 (2.4)
Feed	mm/rev (ipr)	1.75 (0.1)
Spindle speed	r/min	1592

* The results, indicated in this catalogue are provided as example. They may not be obtained due to differences in cutting conditions and environmental conditions during measurement.



Standard / Optional Specifications

Various optional features are available for customer-specific work environments.

● Standard ○ Optional X Not applicable

NO.	Description	Features	Lynx 2100 A/LA	Lynx 2100 B/LB	Lynx 2100 MA/LMA/LMSA	Lynx 2100 MB/LMB/LMSB
1	Chuck	6 inch	●	X	●	X
2		8 inch	○	●	○	●
3		10 inch	X	○	X	○
4		None	○	○	○	○
5	Jaw	Soft jaw	●	●	●	●
6		Hard jaw	○	○	○	○
7	Chucking option	DUAL PRESSURE CHUCKING	○	○	○	○
8		CHUCK CLAMP CONFIRMATION	○	○	○	○
9	Turret	Rotary tool_6000r/min	X	X	●	●
10		Rotary tool_10000r/min	X	X	○	○
11	Coolant pump	1.5 bar	●	●	●	●
12		4.5 bar	○	○	○	○
13		7 bar	○	○	○	○
14		10 bar	○	○	○	○
15		14.5 bar	○	○	○	○
16	Coolant pump (opt.)	4.5 bar	○	○	○	○
17	Coolant options	Oil Skimmer	○	○	○	○
18		Coolant chiller	○	○	○	○
19		Coolant pressure switch	○	○	○	○
20		Coolant level switch	●	●	●	●
21	Side chip conveyor	Hinged belt	○	○	○	○
22		Magnetic scrapper	○	○	○	○
23		Screw (auger)	○	○	○	○
24	Rear chip conveyor	Hinged belt	○	○	○	○
25		Magnetic scrapper	○	○	○	○
26		Screw (auger)	○	○	○	○
27	Chip bucket	Forklift 110L (for auger conveyor)	○	○	○	○
28		Forklift 200L (for auger conveyor)	○	○	○	○
29		Forklift 220L	○	○	○	○
30		Forklift 300L	○	○	○	○
31		Forklift 380L	○	○	○	○
32		Rotation 220L	○	○	○	○
33		Rotation 300L	○	○	○	○
34	Rotation 380L	○	○	○	○	
35	Chip processing options	Air blower	○	○	○	○
36		Chuck coolant	○	○	○	○
37		Coolant gun	○	○	○	○
38		Mist collector ready	○	○	○	○
39		Assembled mist collector	○	○	○	○
40	Measurement & Automation	Bar feeder system	○	○	○	○
41		Auto door	○	○	○	○
42		Tool setter (Manual)	○	○	○	○
43		Tool setter (Auto)	○	○	○	○
44		Parts catcher and box	○	○	○	○
45		Parts catcher and conveyor	○	○	○	○
46	Standard devices	Front door interlock	●	●	●	●
47		Manual book	●	●	●	●
48		Installation parts	●	●	●	●
49		safety sticker	●	●	●	●
50		Work light	●	●	●	●
51		Standard operation tools	●	●	●	●
52		Foot switch	●	●	●	●
53	Optional devices	Tool monitoring system	●	●	●	●
54		Signal tower	○	○	○	○
55		Air gun	○	○	○	○
56		Auto power off	○	○	○	○

Peripheral Equipment

Basic information


- Basic Structure
- Cutting
- Performance

Detailed Information

- Options
- Applications
- Diagrams
- Specifications

Customer Support Service

Chip Conveyor (option 21~26)

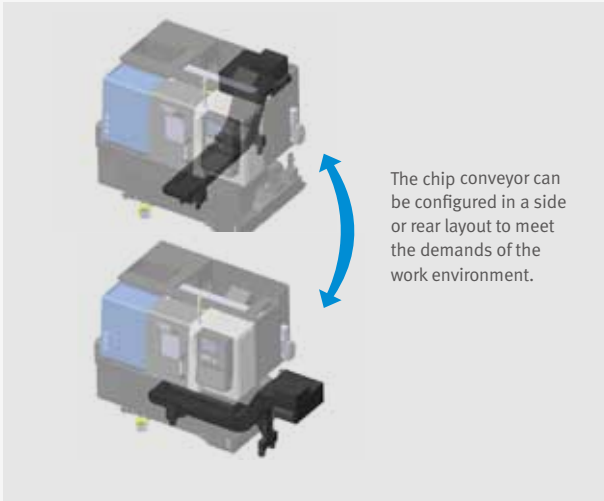

The chip conveyor can be configured in a side or rear layout to meet the demands of the work environment.

Chip conveyor type	Material	Description
Hinged belt	Steel	Most typical type of chip conveyor. Appropriate for steel materials generating chips of length of 30 mm or more.
Screw (auger)	Steel	Chip conveyor with smallest footprint. Demands 80% of footprint comparing to hinged belt.
Magnetic scrapper	Cast iron	Chip conveyor with magnet equipped: Appropriate for cast iron workpieces generating fine chips.

Quick change CAPTO (option)



The Quick Change Tool system simplifies tool change operation. Recommended for users who need to change tools frequently or reduce the set-up time.

Grease Lubrication System




The standard grease lubrication system eliminates the need for an oil skimmer and reduces lubrication costs by about 80% compared to oil lubrication.

Yearly maintenance cost
Max. **80%** ↓

Coolant Chiller (option 18)

The detachable coolant chiller is recommended to maintain thermal error at a minimal level and achieve superior machining precision.

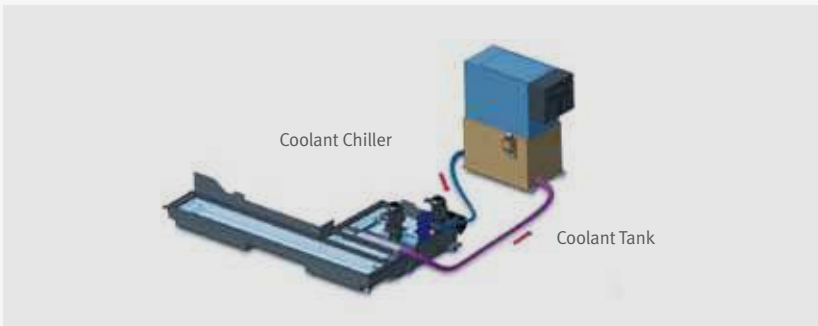

Easy-to-clean Coolant Tank

The coolant tank can be isolated without removing the chip conveyor, significantly enhancing the operator's convenience.




Tool Setter (Manual /Auto) (Tool length measurement device) (option 42~43)
The tool setter facilitates the setting of machining tools, and can be used to automatically compensate for worn tools accurately.



Part Catcher (option 44~45)
The Part Catcher automatically catches finished parts and transfers them to the downstream processes.



Oil Skimmer (option 17)
As the Lynx 2100 Series uses a grease type lubricant, the coolant rarely mixes with oil. This optional oil skimmer helps keep exceptional service life of the coolant.

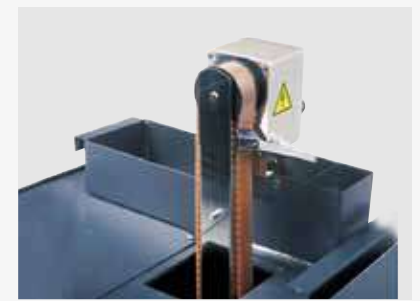

DOOSAN FANUC i

CNC optimized for DOOSAN's machine tools maximizes productivity.

User-Friendly Operation Panel

The newly-designed operation panel enhances operating convenience by incorporating common-design buttons and layout, and features the Qwerty keyboard for fast and easy operation.




- 10.4-inch display**
 - Vertical soft key
- USB & PCMCIA card (standard)
 - QWERTY keyboard
 - Ez-guide i (standard)
 - Ergonomically designed operation panel for greater user convenience
 - Hot key



Improved Productivity

Cycle time, mechanism operating speed, acceleration and deceleration are optimized and non-cutting times during cutting operation are analyzed and minimized to enhance productivity.

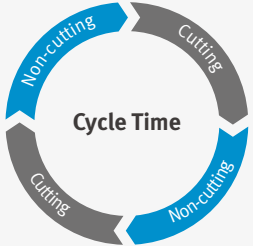


Non-cutting time reduced by **10%**



EZ-Guide i

Using the DOOSAN EZ-Guide i, users can create a cutting program for any desired shape, including patterns, by entering the appropriate figures only.

Exemplary Programming

Exemplary cutting shape	EZ-Guide i Screen	Automatic creation of cutting program
 	 Enter the dimensions of the desired shape.	<pre>O7000 (SAMPLE PROGRAM) ; ... M3 S1500 ; G0 X50. Y125. ; G0 Z30. ; G1040 T0.5 J3. H0.2 K0.5 ... ; G1020 H120. V50. U37. W68. ; G0 Z80. ; M5 ;</pre> A cutting program is automatically created with the entered values.

Easy Operation Package

Doosan Easy Operation Package (EOP) supports the user with tool, help desk, operation, functionalities to maximize operational efficiency and user convenience.


Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

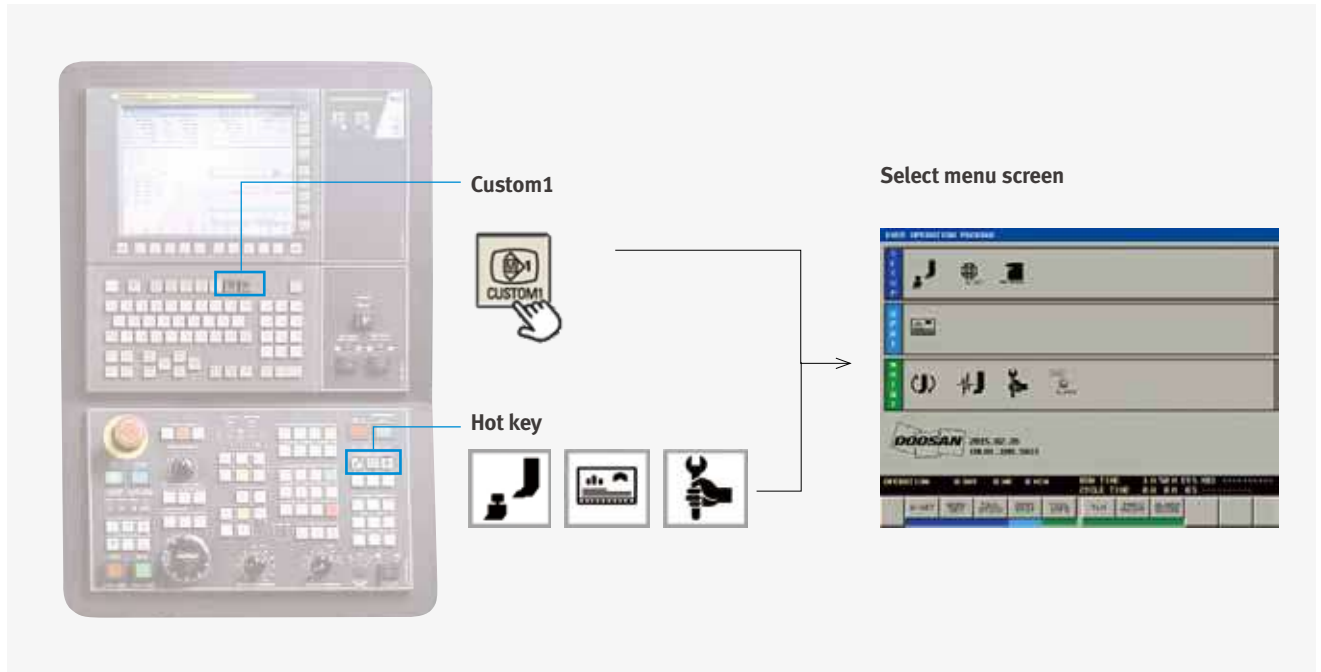

Convenient set up for peripheral equipment

Helps tool setter guide, work setting, tailstock setting, and other measurement and parameter control to reduce setting-up time and facilitates operation.




Screen for monitoring the machine and operating conditions

The screen provides a complete view of machine operation. Information on the feed system position, offset, feedrate and spindle speed, tool life and count in an easy-to-view screen.



Management Convenience Screen

Helps to prepare tools and provides for visual information on alarms to reduce maintenance time.

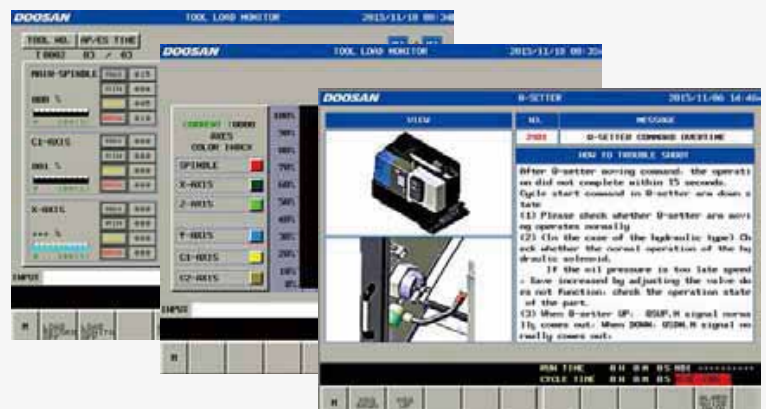

SIEMENS CNC have been adopted and optimized for DOOSAN's machine tools to maximize users' productivity.




10.4 inch display

- Qwerty keyboard
- USB / CF-card (std.)
- shop turn (std.)

Conversational Convenient function


The machining monitoring function developed on the basis of the Shop Turn – an interactive machining support function of SIEMENS – provides users with cutting, servicing and maintenance screens for easy and convenient machine operation.

Cutting and operation support function



This function shows a cutting and tool path simulation of a cutting program on a real-time basis.

Tail stock function



Dialogic Screen will help easy setting and operating about CNC Tail stock.

Shop-turn mode[various] → [attachments]

Operation safety function



Spindle and Turret's interference could be checked before crash. So that it Protect operator's mistake.

[offset] → [operating parameter] → [attachment setting] → [Collision avoidance]


Maintenance and service convenience function



Maintenance and service of major units and peripheral devices, timer setting and parts counter setting can be easily carried out on a convenient screen.

[offset] → [operating parameter] → [TC service]

Machining accuracy improvement



The NC controls spindle speed at an optimal level for precision threading and turning, making it possible to improve surface roughness automatically.

[various] → [attachment] → [DSSV]



Before applying the function

After applying the function

Power-Torque Diagram (FANUC)

Basic information


Basic Structure
Cutting
Performance

Detailed Information


Options
Applications
Diagrams
Specifications

Customer Support Service


Main Spindle

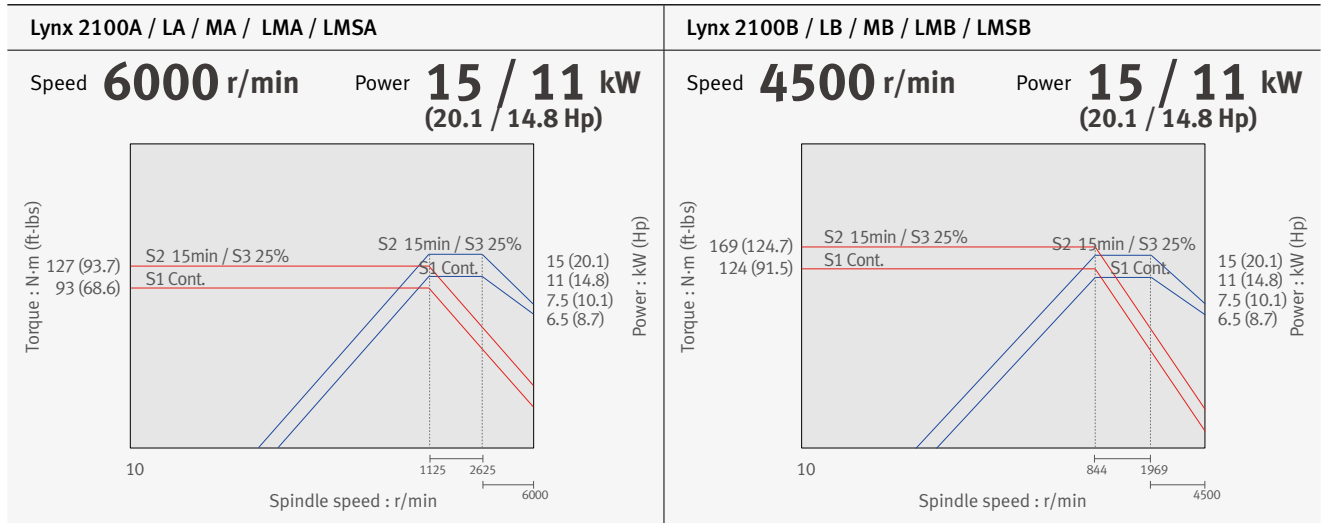

Sub-Spindle

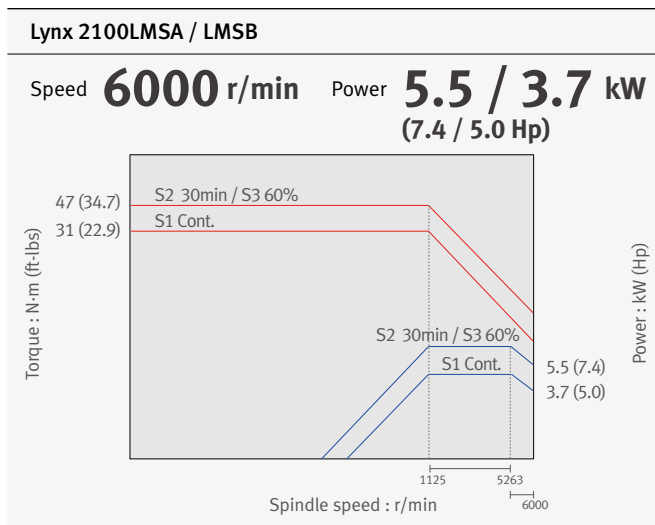


Rotary Tool

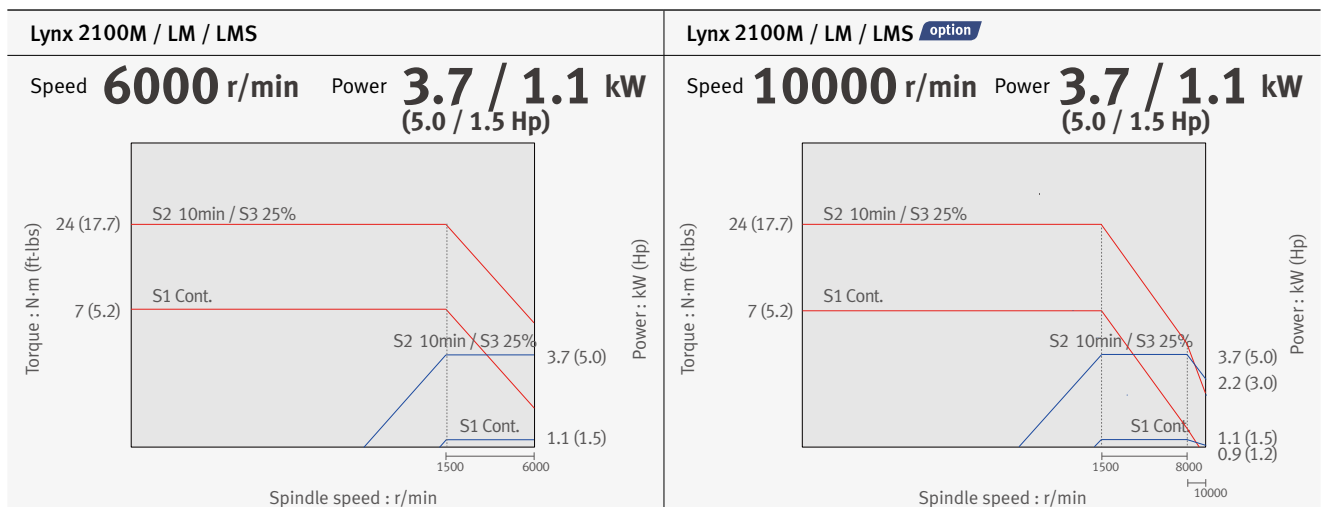


Power-Torque Diagram (SIEMENS)


Main Spindle

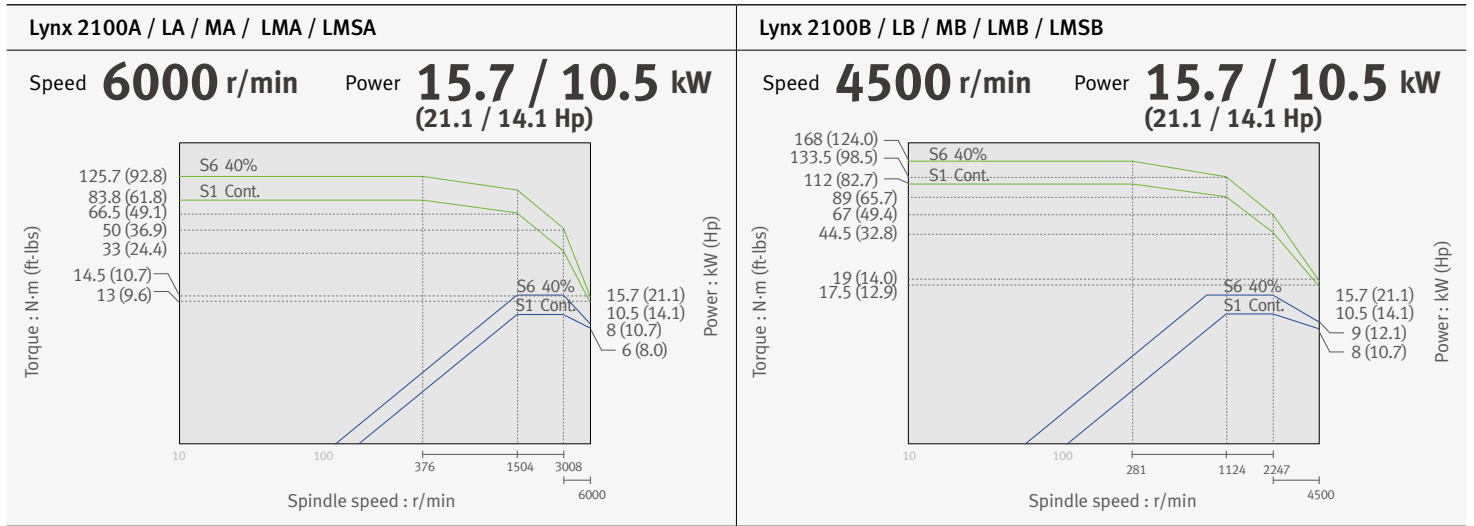

Sub-Spindle

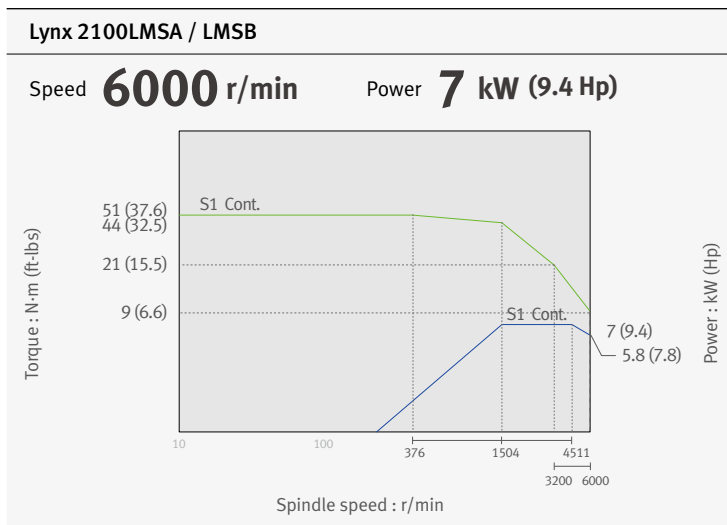

Rotary Tool

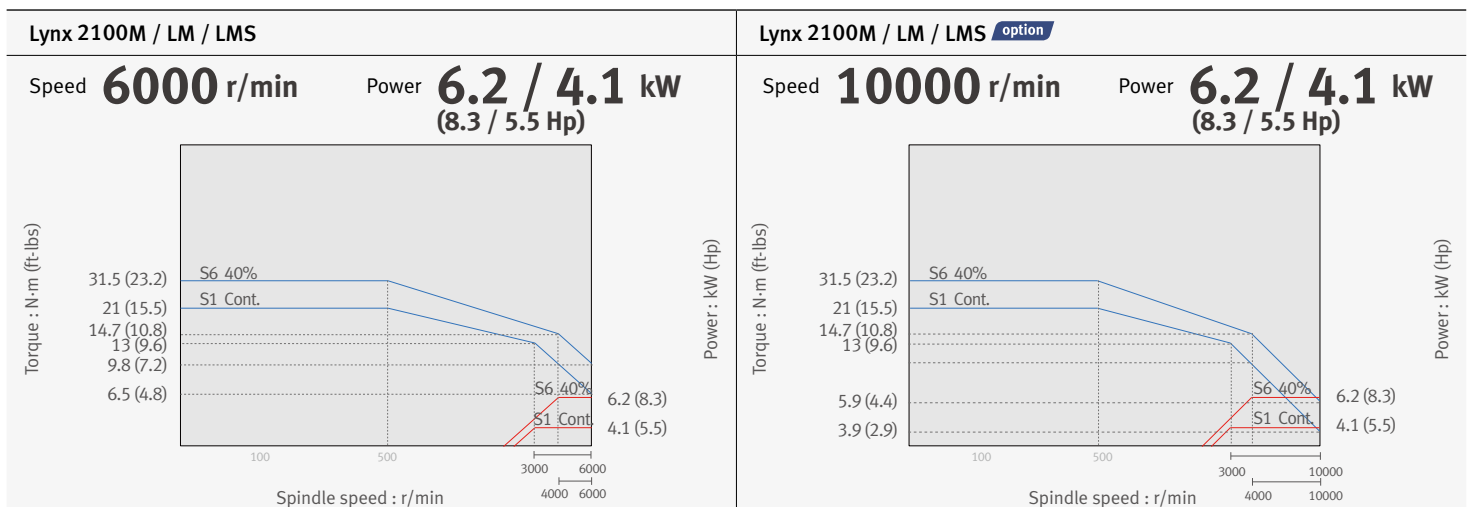

External Dimensions

Basic information

Basic Structure
Cutting
Performance

Detailed Information


Options
Applications
Diagrams
Specifications

Customer Support Service


Lynx 2100 series

Unit : mm (inch)

Top View

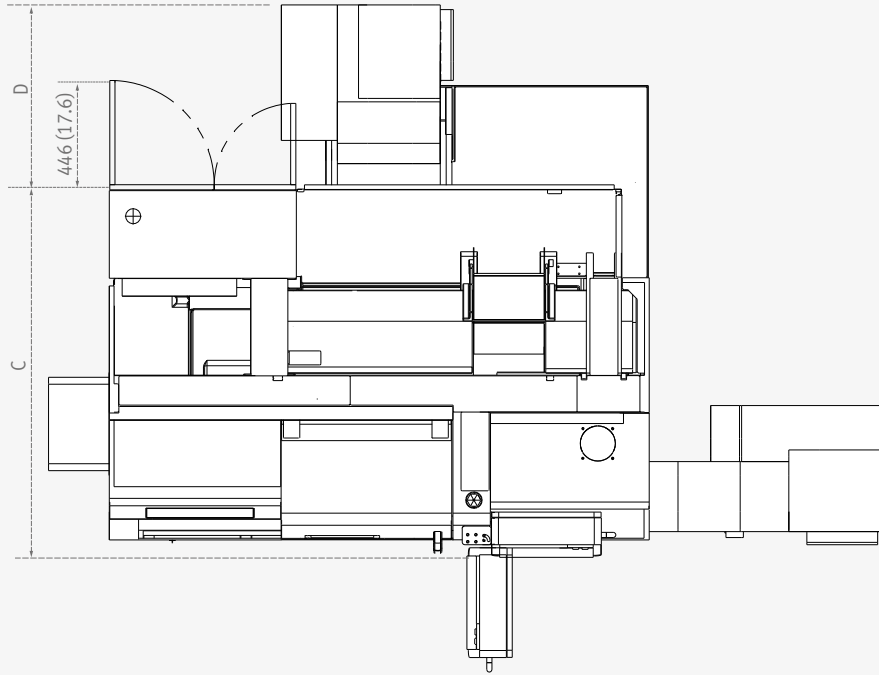


Front View

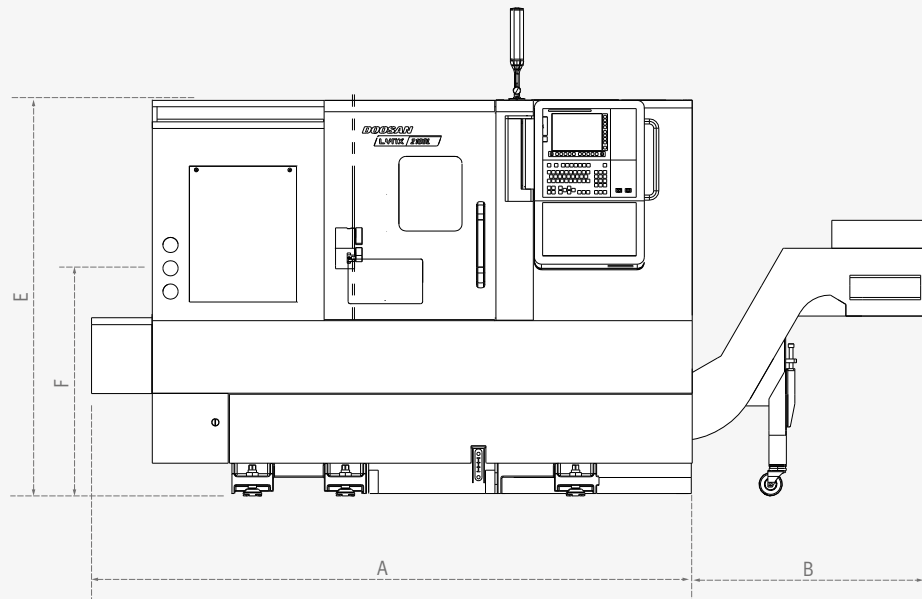

Models	A	B		C	D		E	F spindle center
		side hinged chip conveyor	side screw (auger) chip conveyor		rear hinged chip conveyor	rear screw (auger) chip conveyor		
Lynx 2100A / MA [B / MB]	2320 [2350] (91.3 [92.5])	953 (37.5)	759 (29.9)	1595 (62.8)	770 (30.3)	583 (23.0)	1693 (66.7)	1060 (41.7)
Lynx 2100LA / LMA [LB / LMB]	2540 [2570] (100.0 [101.2])	997 (39.3)	830 (32.7)			616 (24.3)		1070 (42.1)
Lynx 2100LMSA [LMSB]	2805 [2835] (110.4 [111.6])	997 (39.3)	830 (32.7)			616 (24.3)		1060 (41.7)

Tooling System

Lynx 2100A / B / LA / LB (10/12 station)

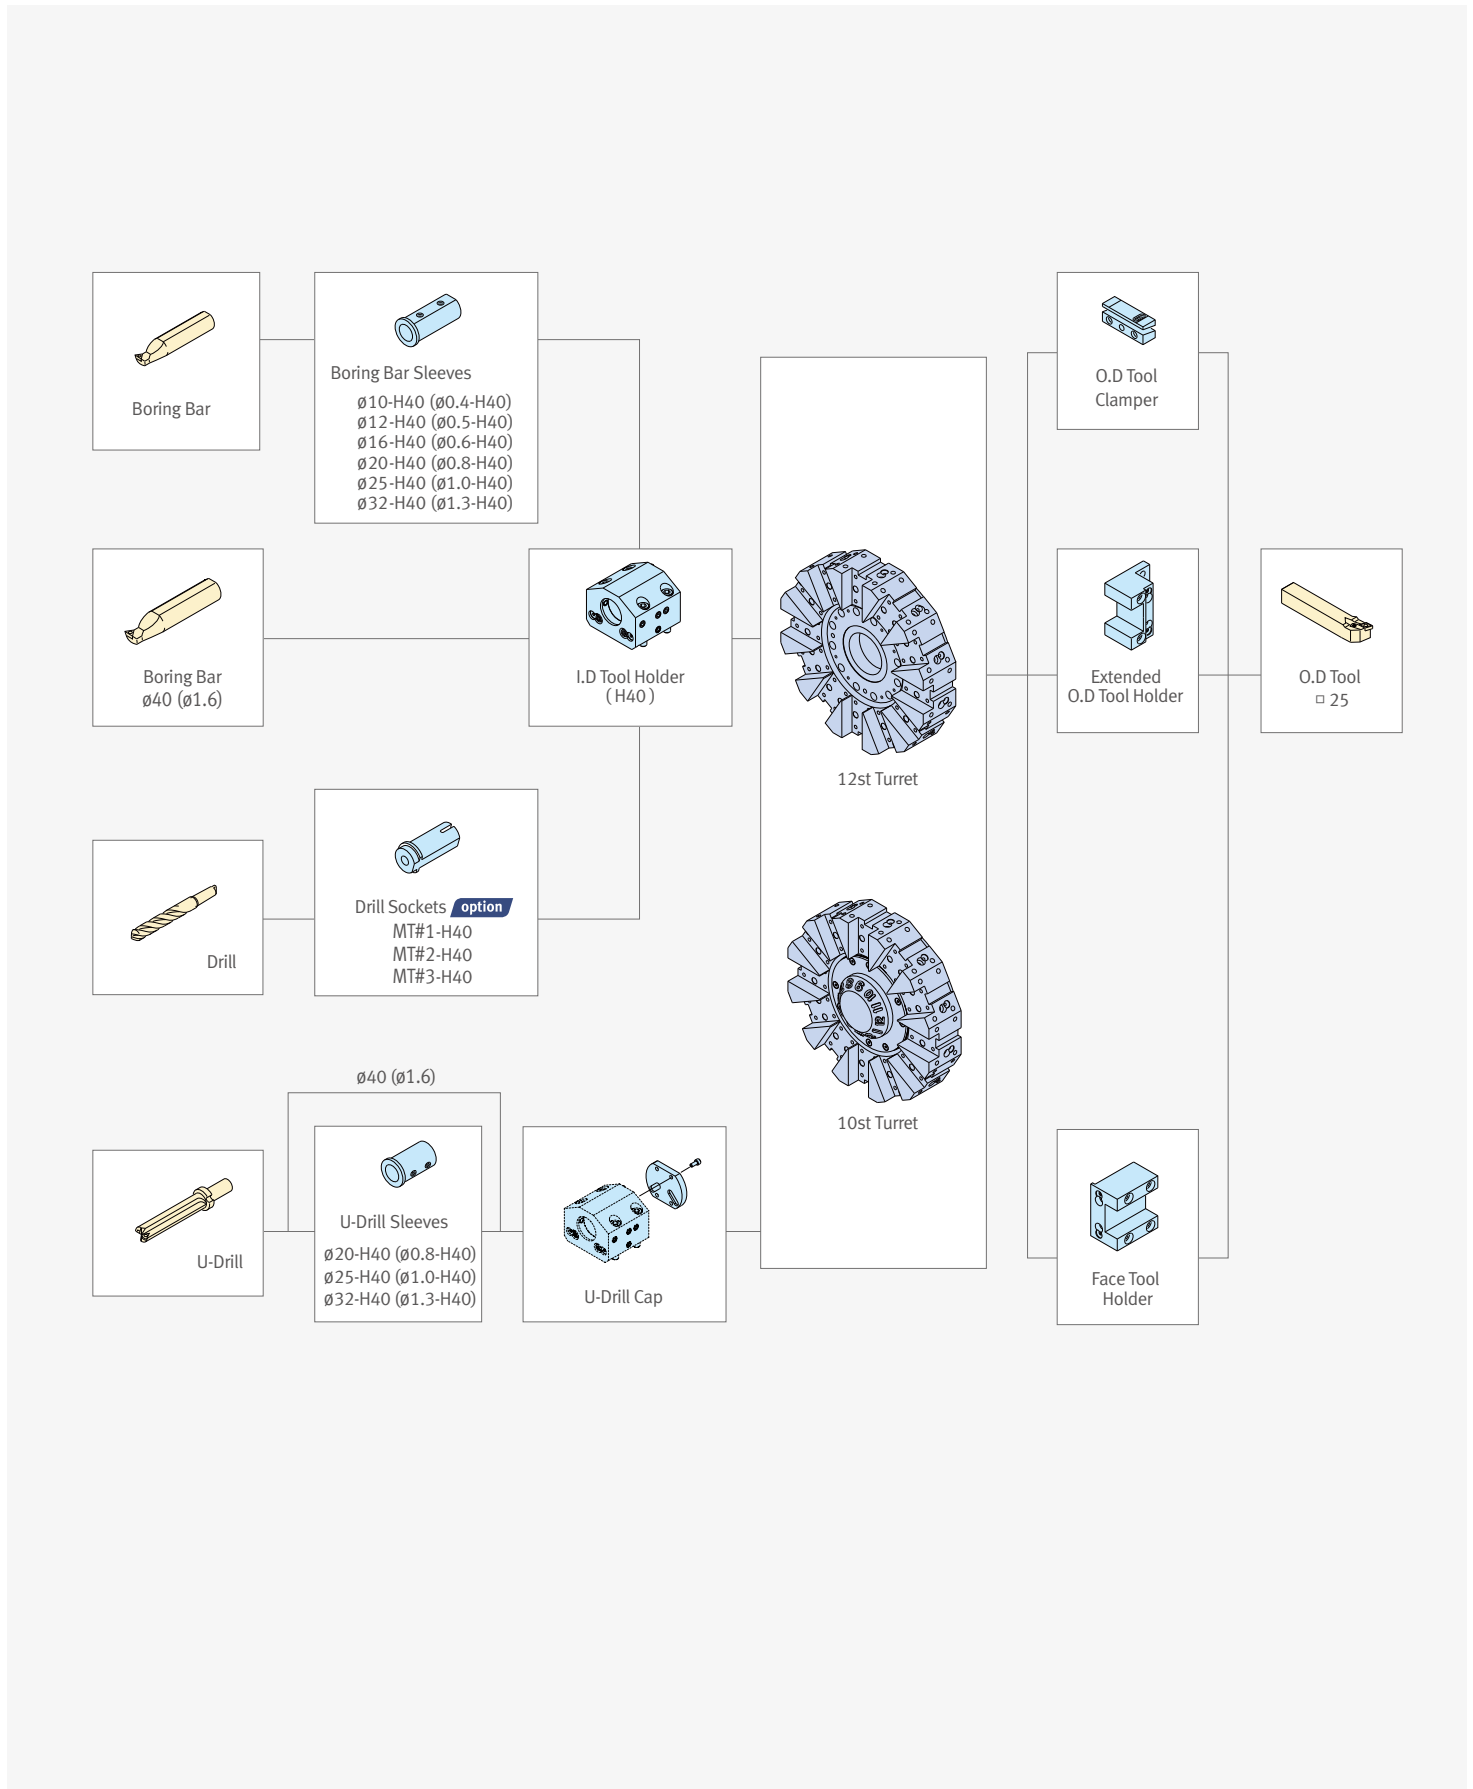

Tooling System

Basic information

- Basic Structure
- Cutting
- Performance


Lynx 2100MA / MB / LMA / LMB (12 station(24 Position Index), BMT45P)

Unit : mm (inch)

Detailed Information

- Options
- Applications
- Diagrams
- Specifications


Customer Support Service

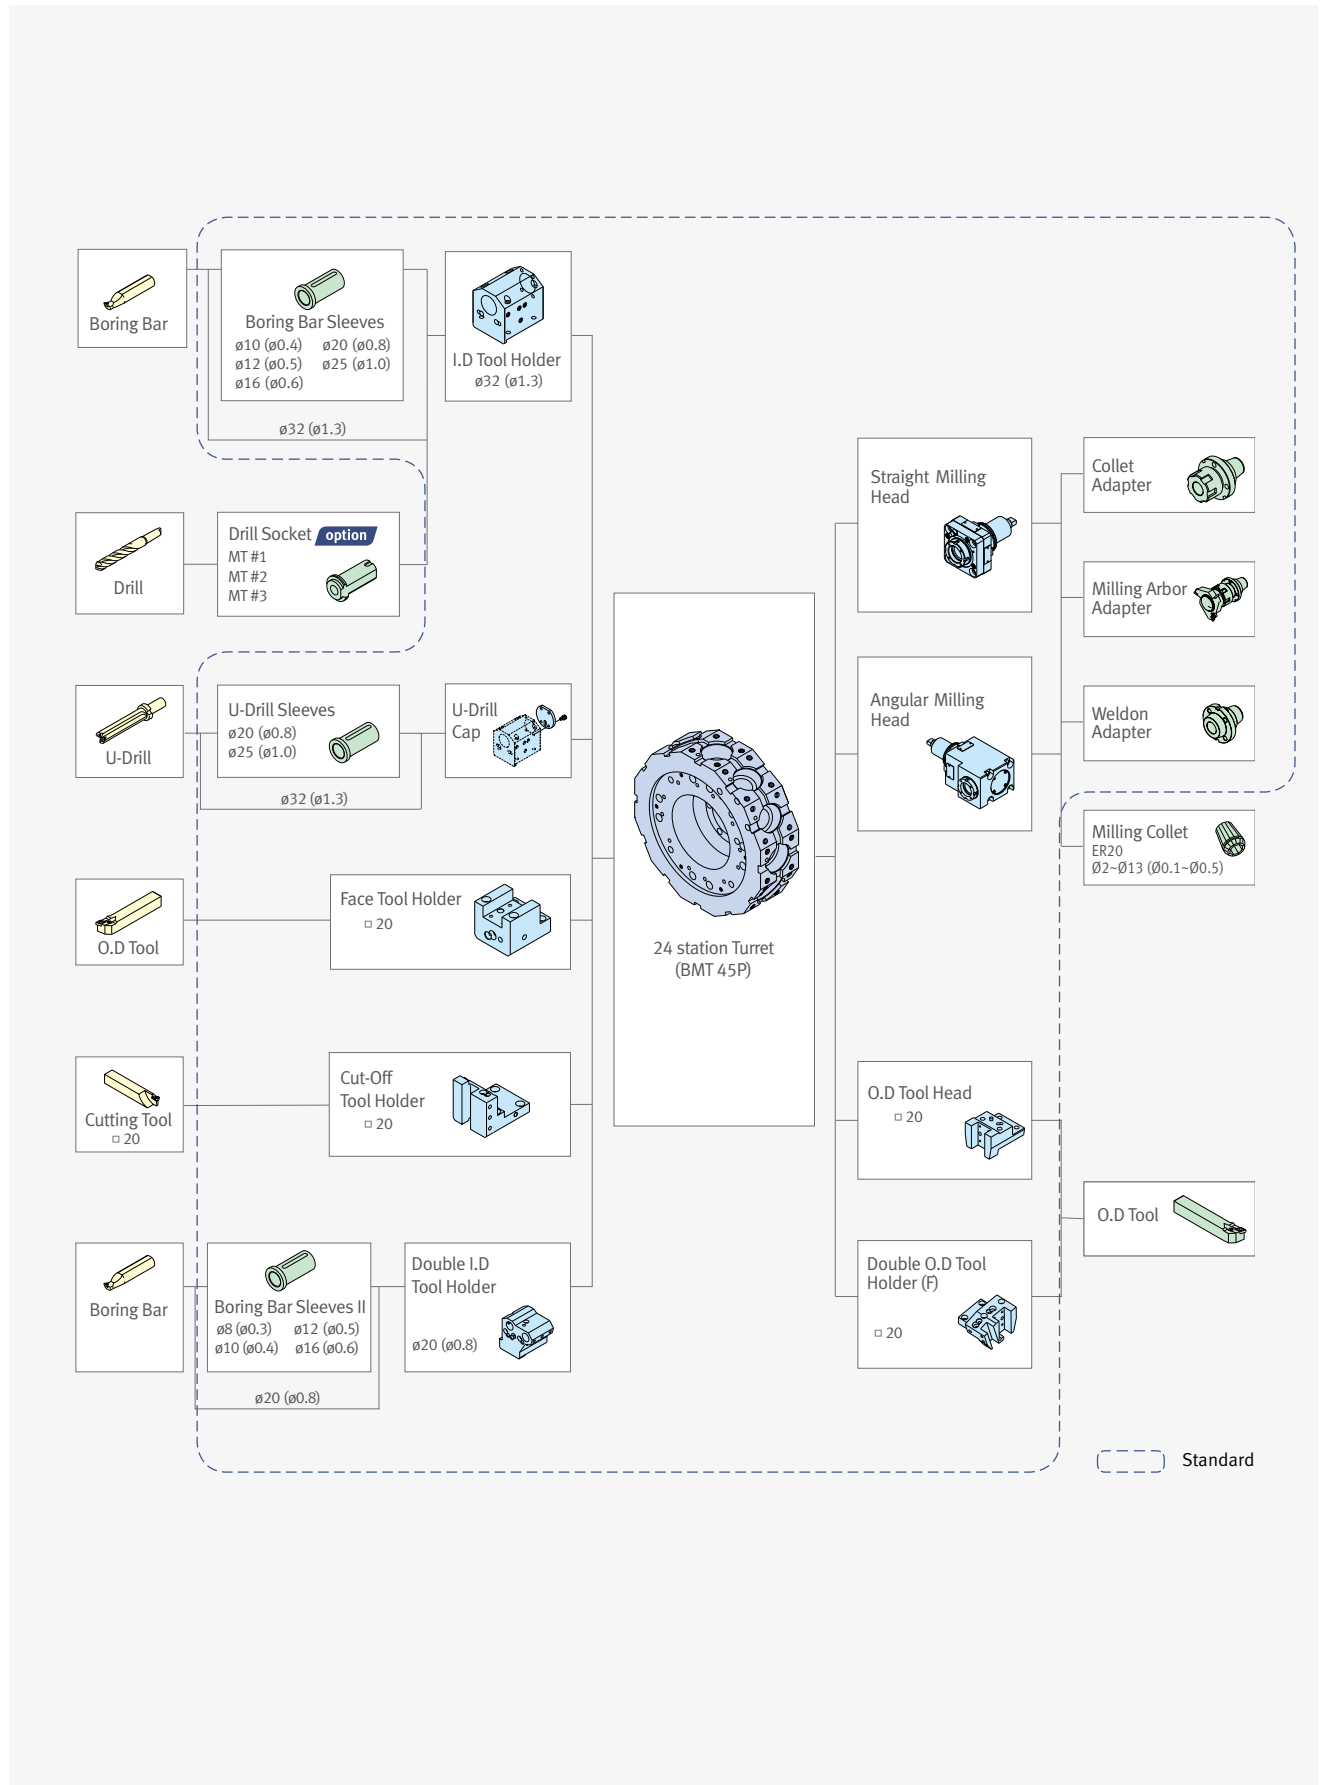

Tooling System

Lynx 2100LMSA / LMSB (12 station(24 Position Index), BMT45P)

Unit : mm (inch)

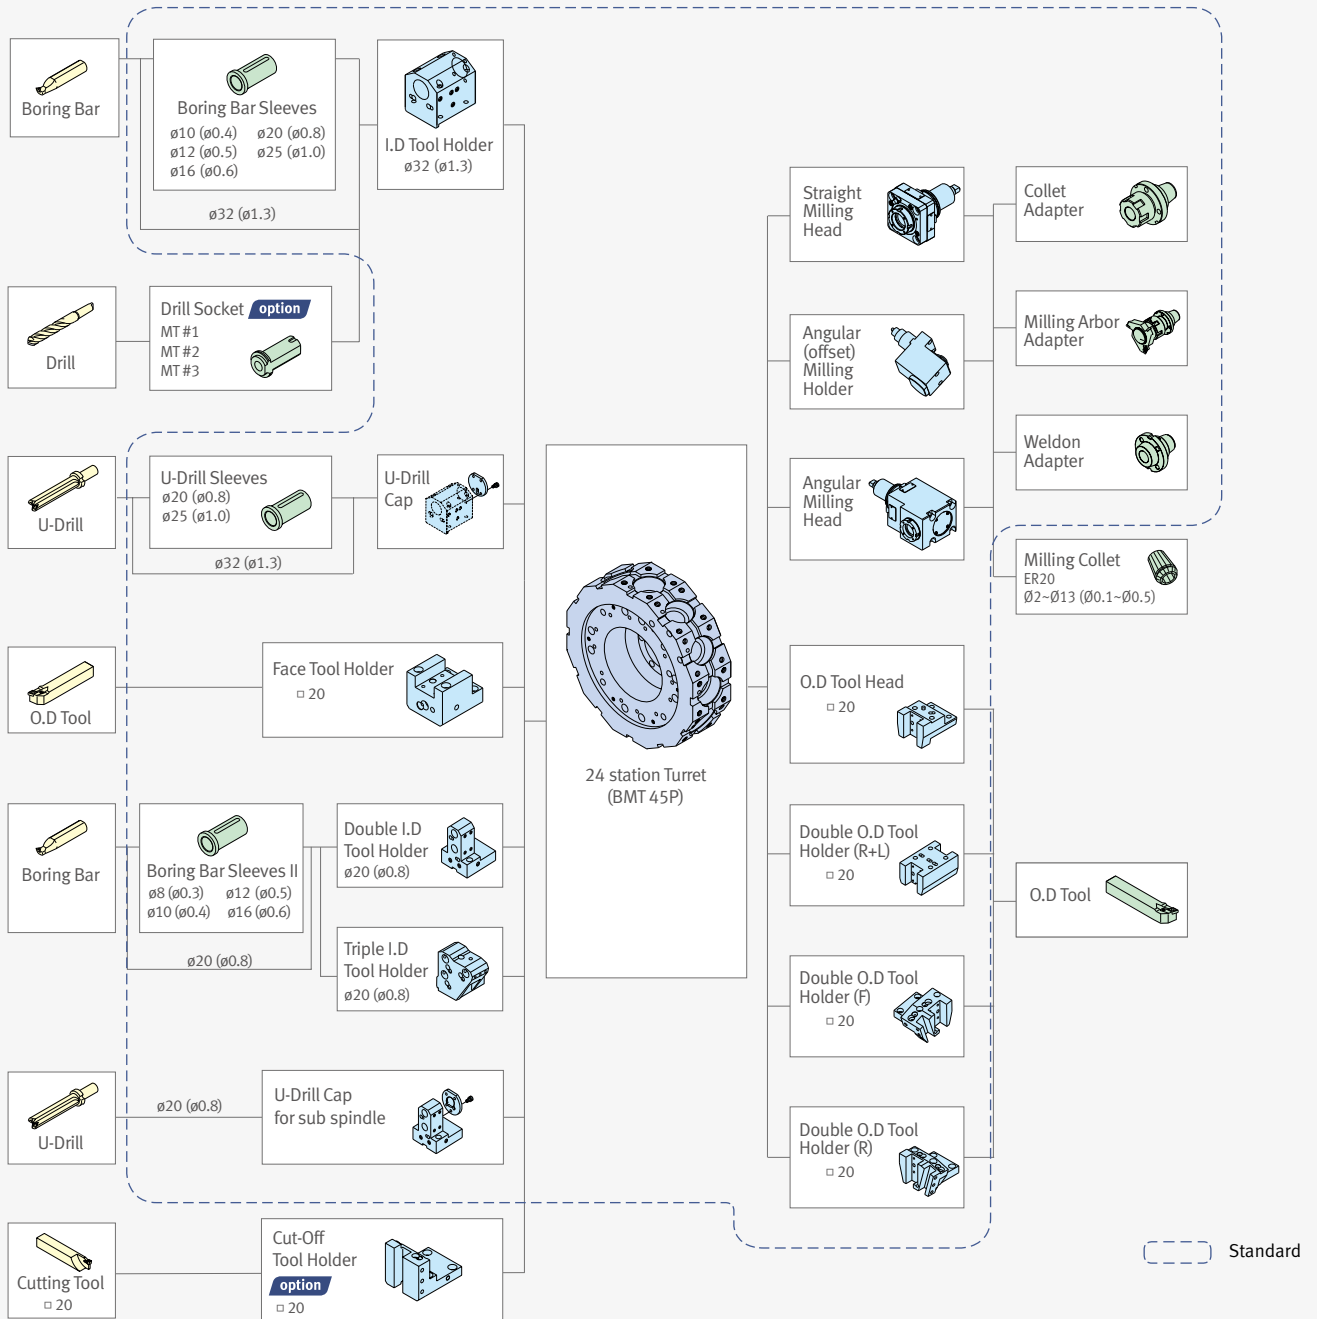

Tool Interference Diagram

Basic information

- Basic Structure
- Cutting
- Performance


Detailed Information

- Options
- Applications
- Diagrams
- Specifications


Customer Support Service

Lynx 2100A / B / LA / LB

Unit : mm (inch)

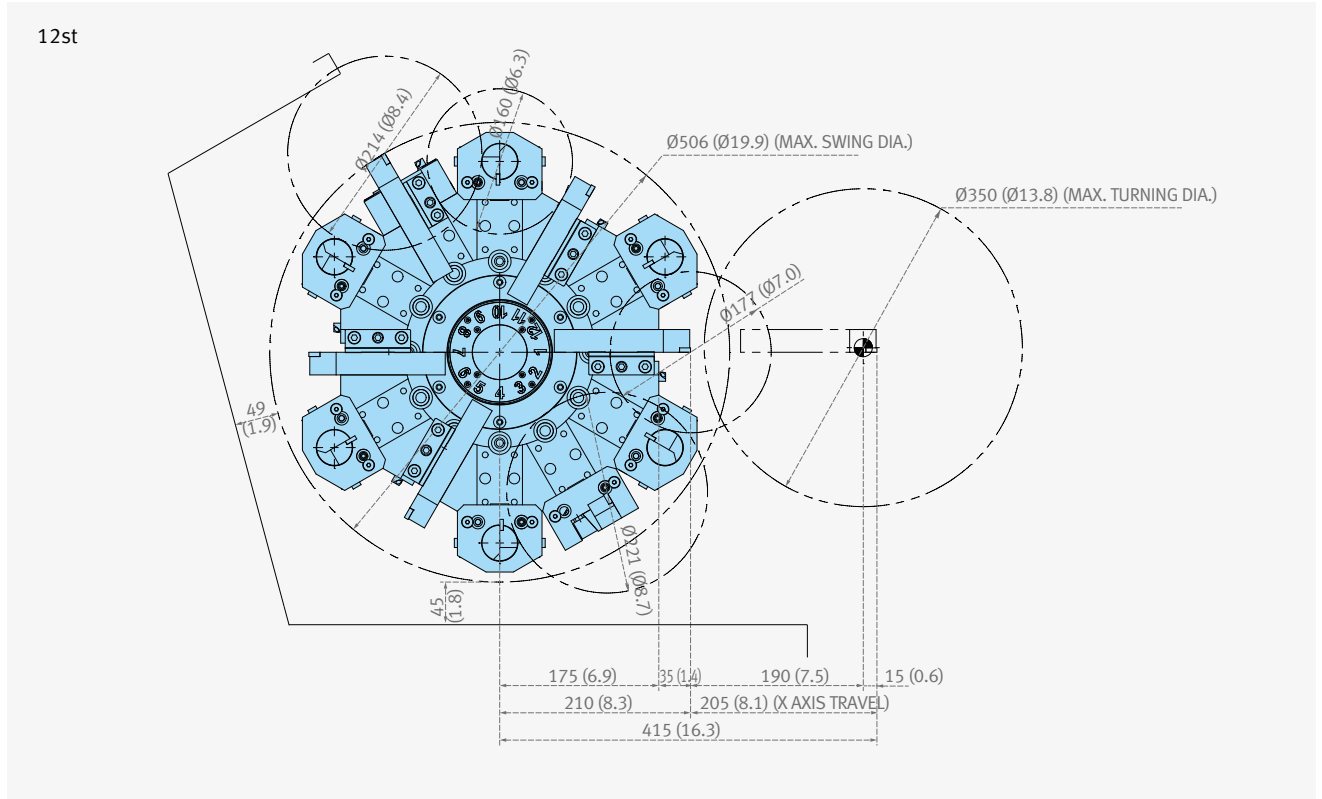


Unit : mm (inch)

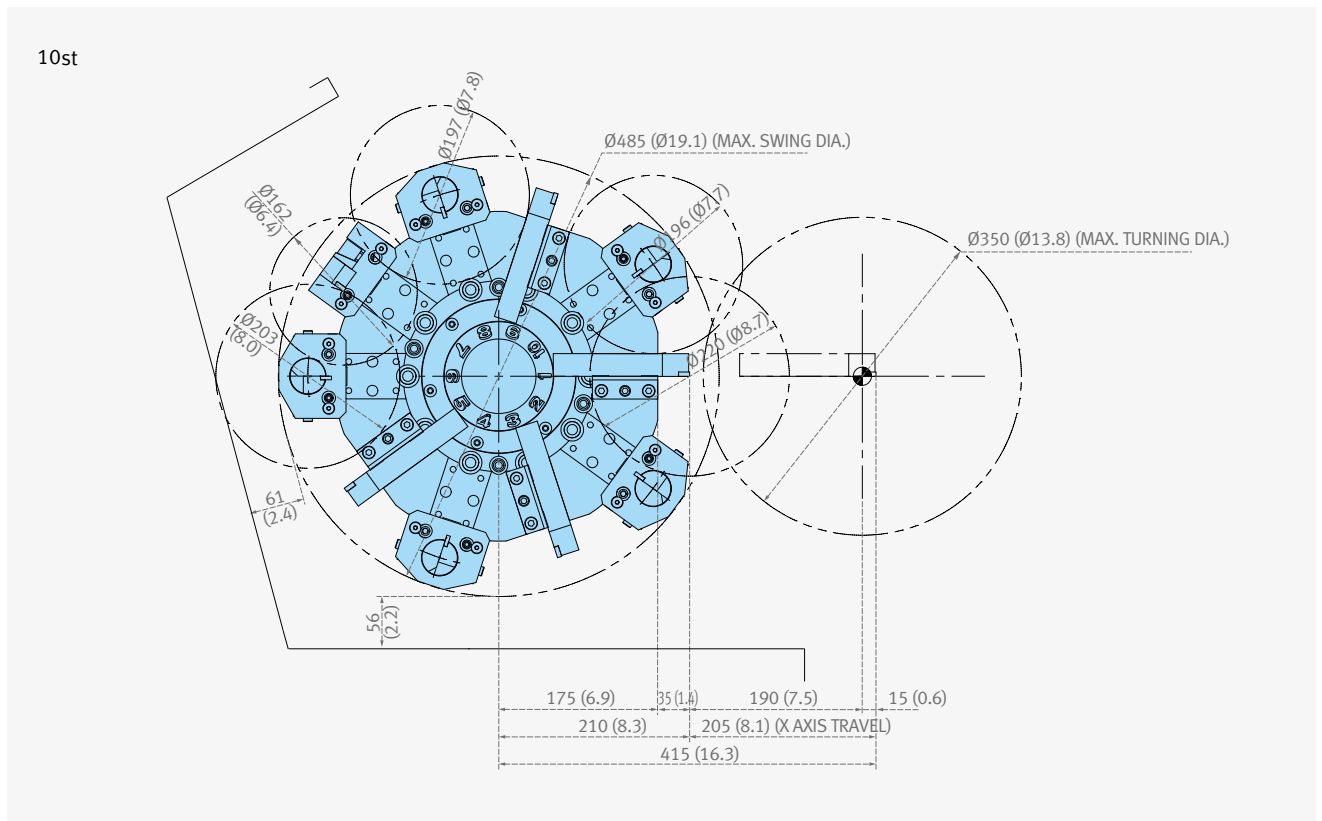

Tool Interference Diagram


Lynx 2100MA / MB / LMA / LMB

Unit : mm (inch)

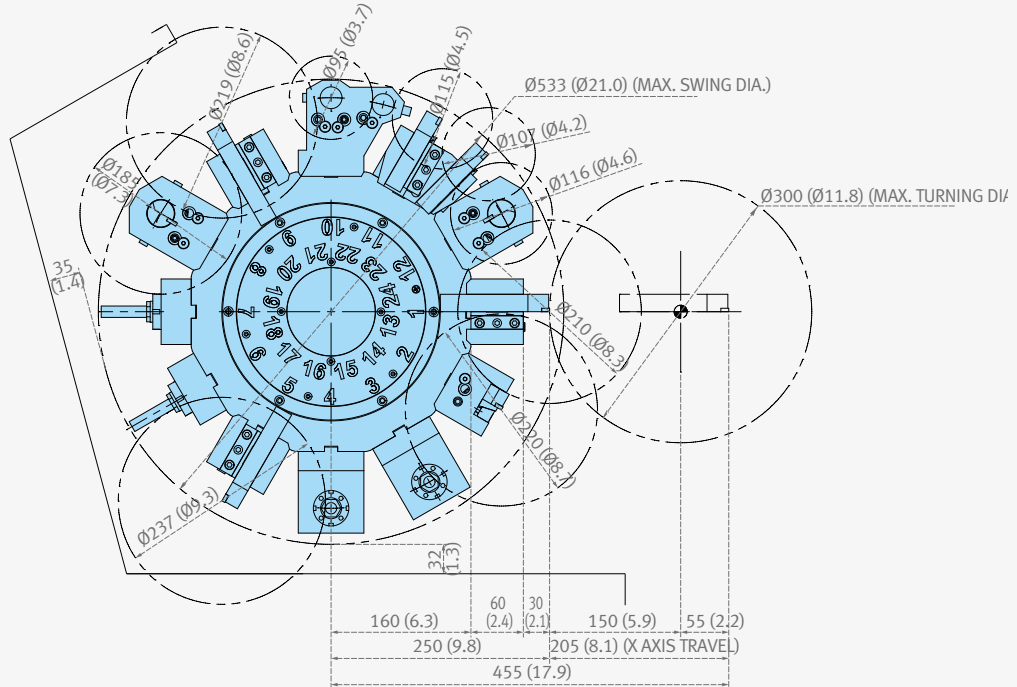

Lynx 2100LMSA / LMSB

Unit : mm (inch)

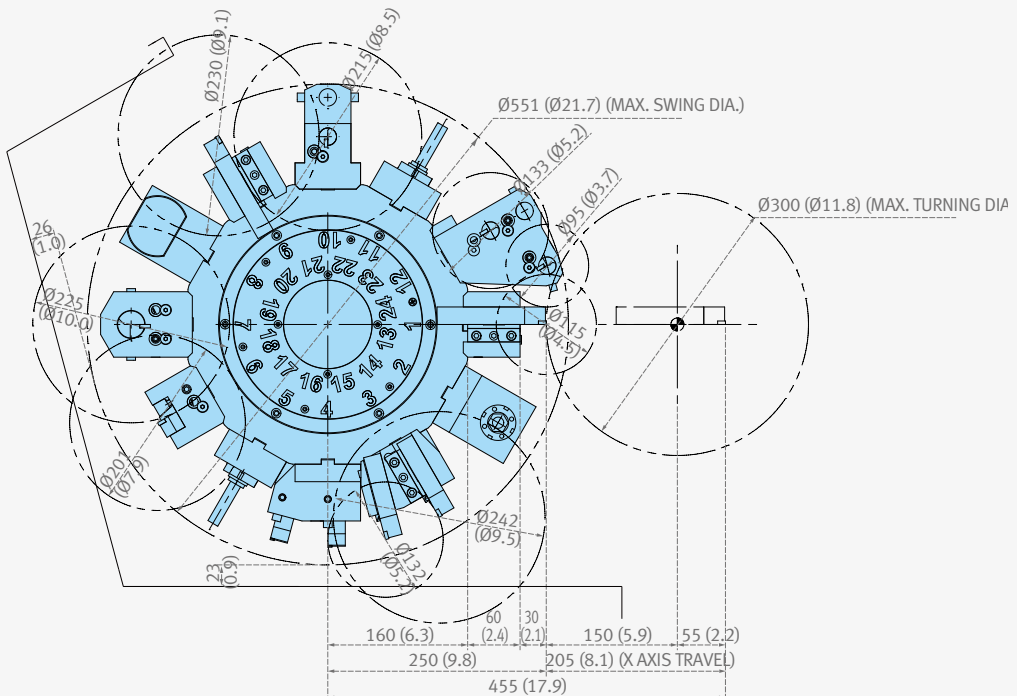

Working Range

Basic information

- Basic Structure
- Cutting
- Performance

Detailed Information


- Options
- Applications
- Diagrams
- Specifications

Customer Support Service


Lynx 2100A / B / LA / LB

Unit : mm (inch)


OD Holder

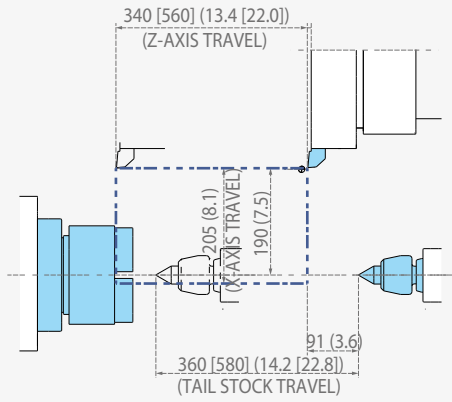


ID HOLDER

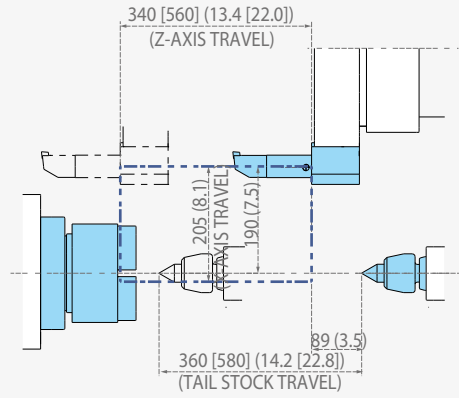

Face Tool Holder

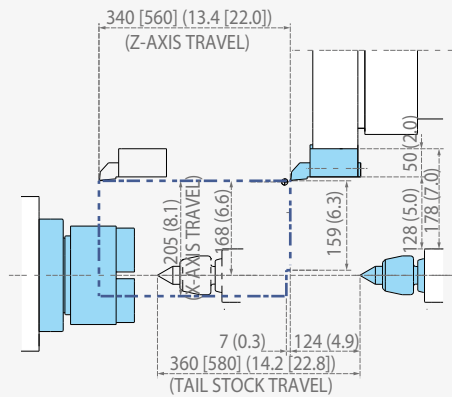

Extended OD Holder

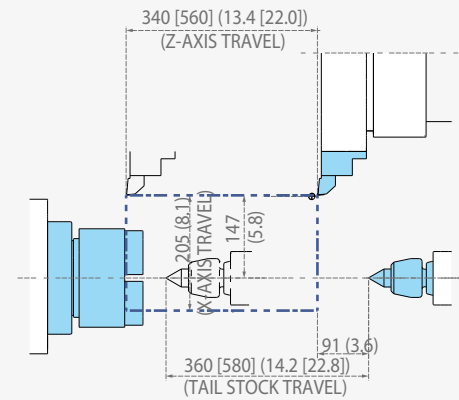


Working Range


Lynx 2100MA / MB / LMA / LMB

Unit : mm (inch)


OD Holder

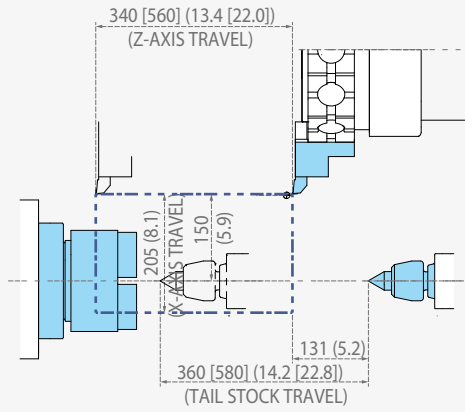


ID HOLDER

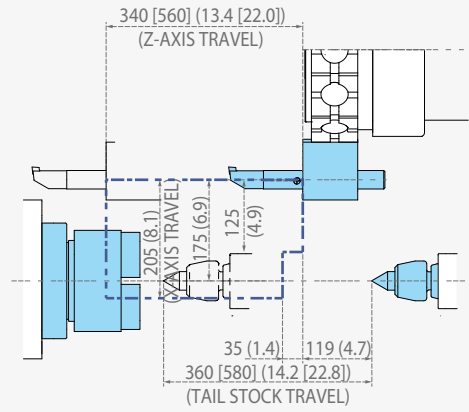


Face Tool Holder

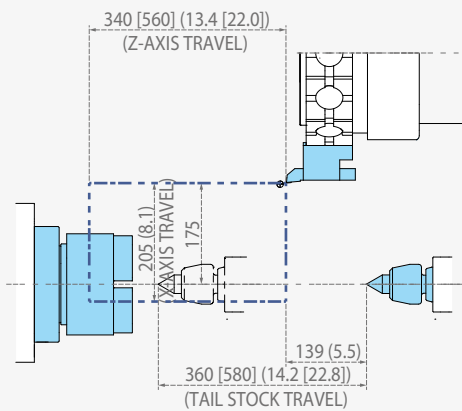


Double OD Holder

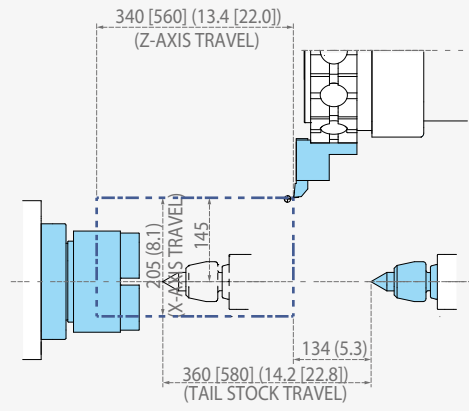

Straight Milling Holder

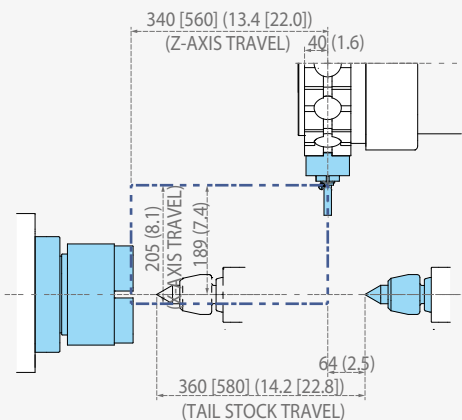

Angular Milling Holder

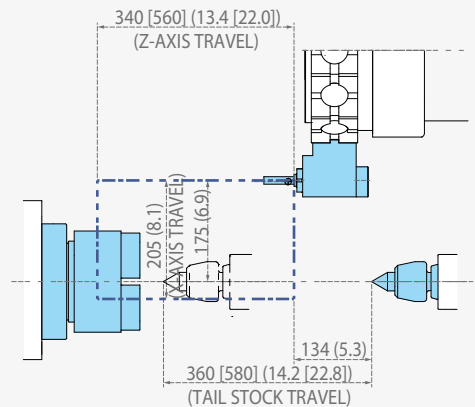

Machine Specifications



Description		Unit	Lynx 2100A [LA]	Lynx 2100MA [LMA]	Lynx 2100LMSA	Lynx 2100B [LB]	Lynx 2100MB [LMB]	Lynx 2100LMSB
Capacity	Swing over bed	mm (inch)	600 (23.6)					
	Swing over saddle	mm (inch)	400 (15.7)					
	Recommended turning diameter	mm (inch)	170 (6.7)					
	Max. turning diameter	mm (inch)	350 (13.8)	300 (11.8)	300 (11.8)	350 (13.8)	300 (11.8)	300 (11.8)
	Max. turning length	mm (inch)	330 [550] (13.0 [21.7])	290 [510] (11.4 [20.1])	510 (20.1)	330 [550] (13.0 [21.7])	290 [510] (11.4 [20.1])	510 (20.1)
	Chuck size	inch	6 {8}			8{10}		
	Bar working diameter	mm (inch)	51 (2.0)			65 (2.6)		
Travel	Travel distance	X-axis	205 (8.1)					
		Z-axis	340 [560] (13.4 [22.0])					
Feedrate	Rapid traverse	X-axis	30 (1181.1)					
		Z-axis	36 (1417.3)					
Spindle	Spindle speed	r/min	6000			4500		
	Spindle motor power (15min / cont.) (FANUC)	kW (Hp)	15 / 11 (20.1 / 14.8)					
	Spindle motor power (S6 40%/ cont.) (SIEMENS)	kW (Hp)	15.7 / 10.5 (21.1 / 14.1)					
	Max. spindle torque (FANUC)	N-m (ft-lbs)	127 (93.7)			169 (124.6)		
	Max. spindle torque (SIEMENS)	N-m (ft-lbs)	125.7(92.8)			168(124.0)		
	Spindel nose	ASA	A2-5			A2-6		
	Spindle bearing diameter	mm (inch)	90 (3.5)			110 (4.3)		
	Spindle inner diameter	mm (inch)	61 (2.4)			76 (3.0)		
	C-axis min.indexing angle	deg	-	0.001	0.001	-	0.001	0.001
Turret	No.of tool stations	ea	12 {10}	12	12	10 {12}	12	12
	OD tool size	mm (inch)	25 x 25 (1.0 x 1.0)	20 x 20 (0.8 x 0.8)	20 x 20 (0.8 x 0.8)	25 x 25 (1.0 x 1.0)	20 x 20 (0.8 x 0.8)	20 x 20 (0.8 x 0.8)
	Max.ID tool size	mm (inch)	40 (1.6)	32 (1.3)	32 (1.3)	40 (1.6)	32 (1.3)	32 (1.3)
	Turret indexing time	s	0.11 {0.15}	0.11	0.11	0.15 {0.11}	0.11	0.11
	Max.rotary tool speed	r/min	-	6000 {10000}	6000 {10000}	-	6000 {10000}	6000 {10000}
	Ratary tool motor power (FANUC)	kW (Hp)	-	3.7 (5.0)	3.7 (5.0)	-	3.7 (5.0)	3.7 (5.0)
	Rotary tool motor power (SIEMENS)	kW (Hp)	-	6.2 (8.3)	6.2 (8.3)	-	6.2 (8.3)	6.2 (8.3)
Tail stock	Travel distance	mm (inch)	360 [580] (14.1 [22.8])	360 [580] (14.1 [22.8])	-	360 [580] (14.1 [22.8])	360 [580] (14.1 [22.8])	-
	Quill diameter	mm (inch)	65 (2.6)	65 (2.6)	-	65 (2.6)	65 (2.6)	-
	Quill taper	MT	MT#4 (Live)	MT#4 (Live)	-	MT#4 (Live)	MT#4 (Live)	-
Sub spindle	Spindle speed		-	-	6000	-	-	6000
	Spindle motor power (15min / cont.) (FANUC)	kW (Hp)	-	-	5.5 / 3.7 (7.4 / 5.0)	-	-	5.5 / 3.7 (7.4 / 5.0)
	Spindle motor power (cont.) (SIEMENS)	kW (Hp)	-	-	7 (9.4)	-	-	7 (9.4)
	Max. spindle torque	N-m (ft-lbs)	-	-	47 (34.7)	-	-	47 (34.7)
	Spindel nose		-	-	Flat ø110	-	-	Flat ø110
	Spindle bearing diameter	mm (inch)	-	-	75 (3.0)	-	-	75 (3.0)
	Spindle inner diameter	mm (inch)	-	-	43 (1.7)	-	-	43 (1.7)
C-axis min.indexing angle		-	-	0.001	-	-	0.001	
Power source	Power consumption	kVA	25.94	25.94	31.8	25.94	25.94	31.8
Machine dimensions	Length	mm (inch)	2320 [2540] (91.3 [100.0])	2320 [2540] (91.3 [100.0])	2805 (110.4)	2350 [2570] (92.5 [101.2])	2350 [2570] (92.5 [101.2])	2835 (111.6)
	Width	mm (inch)	1595 (62.8)					
	Height	mm (inch)	1693 (66.7)					
	Weight	kg (lb)	3100 [3400] (6834.2 [7495.6])	3170 [3480] (6988.6 [7672.0])	3600 (7936.5)	3100 [3400] (6834.2 [7495.6])	3170 [3480] (6988.6 [7672.0])	3600 (7936.5)
Control	NC system	DOOSAN-FANUC i / SIEMENS 828D						

* { } : Option

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service



NO.	Division	Item	Spec.	DOOSAN-FANUC i		
				2-axis	M	MS
				A / B / LA / LB	MA / MB / LMA / LMB	MSA / MSB
1	Controlled axis	Controlled axes		X, Z	X, Z, C	X, Z, C, B
2		Simultaneously controlled axes		2 axes	3 axes	4 axes
3		Cs contouring control		x	●	●
4		Synchronous / Composite control		x	x	○
5		Torque control		●	●	●
6		HRV2 control		●	●	●
7		Inch / metric conversion		●	●	●
8		Stored stroke check 1		●	●	●
9		Stored stroke check 2,3		●	●	●
10		Stored limit check before move		●	●	●
11		Chamfering on / off		●	●	●
12		Unexpected disturbance torque detection function		●	●	●
13		Position switch		●	●	●
14	Operation	DNC operation	Included in RS232C interface.	●	●	●
15		DNC operation with memory card		●	●	●
16		Quick program restart		○	○	○
17		Tool retract and recover		○	○	○
18		Wrong operation prevention		●	●	●
19		Dry run		●	●	●
20		Single block		●	●	●
21		Reference position shift		●	●	●
22		Handle interruption		○	○	○
23		Incremental feed	x1,x10,x100	●	●	●
24	Manual handle retrace		○	○	○	
25	Interpolation functions	Nano interpolation		●	●	●
26		Linear interpolation		●	●	●
27		Circular interpolation		●	●	●
28		Polar coordinate interpolation		x	●	●
29		Cylindrical interpolation		x	●	●
30		Helical interpolation		x	○	○
31		Thread cutting, synchronous cutting		●	●	●
32		Multi threading		●	●	●
33		Thread cutting retract		●	●	●
34		Continuous threading		●	●	●
35		Variable lead thread cutting		●	●	●
36		Polygon machining with two spindles		x	●	●
37		High-speed skip	Input signal is 8 points.	○	○	○
38		2nd reference position return	G30	●	●	●
39	3rd / 4th reference position return		●	●	●	
40	Feed function	Override cancel		●	●	●
41		AI contour control I		○	○	○
42		AI contour control II		○	○	○
43	Rapid traverse block overlap		●	●	●	
44	Program input	Optional block skip	9 pieces	●	●	●
45		Absolute / incremental programming	Combined use in the same block	●	●	●
46		Diameter / Radius programming		●	●	●

● Standard ○ Optional ✕ Not applicable

NO.	Division	Item	Spec.	DOOSAN-FANUC i		
				2-axis	M	MS
				A / B / LA / LB	MA / MB / LMA / LMB	MSA / MSB
47	Program input	Automatic coordinate system setting		●	●	●
48		Workpiece coordinate system	G52 - G59	●	●	●
49		Workpiece coordinate system preset		●	●	●
50		Direct drawing dimension programming		●	●	●
51		G code system	A	●	●	●
52		G code system	B/C	●	●	●
53		Chamfering / Corner R		●	●	●
54		Custom macro		●	●	●
55		Addition of custom macro common variables	#100 - #199, #500 - #999	●	●	●
56		Interruption type custom macro		●	●	●
57		Canned cycle		●	●	●
58		Multiple repetitive cycles	G70~G76	●	●	●
59		Multiple repetitive cycles II	Pocket profile	●	●	●
60		Canned cycle for drilling		●	●	●
61		Coordinate system shift		●	●	●
62		Direct input of coordinate system shift		●	●	●
63	Pattern data input		●	●	●	
64	Operation Guidance Function	EZ Guidei(Conversational Programming Solution)		●	●	●
65		EZ Operation package		●	●	●
66	Auxiliary / Spindle speed function	Constant surface speed control		●	●	●
67		Spindle override	0 - 150%	●	●	●
68		Spindle orientation		●	●	●
69		Spindle synchronous control		✕	✕	●
70		Rigid tap		●	●	●
71	Arbitrary speed threading		○	○	○	
72	Tool function / Tool compensation	Tool offset pairs	128-pairs	●	●	●
73		Tool offset pairs	200-pairs	○	○	○
74		Tool offset		●	●	●
75		Tool radius / Tool nose radius compensation		●	●	●
76		Tool geometry / wear compensation		●	●	●
77		Automatic tool offset	G36/G37	●	●	●
78		Direct input of offset value measured B		●	●	●
79	Tool life management		●	●	●	
80	Accuracy compensation function	Backlash compensation for each rapid traverse and cutting feed		●	●	●
81		Stored pitch error compensation		○	○	○
82	Editing operation	Part program storage size & Number of registerable programs	5120M(2MB)_1000 programs	○	○	○
83		Part program storage size & Number of registerable programs	1280M(512KB)_400 programs	●	●	●
84		Part program storage size & Number of registerable programs	5120M(2MB)_400 programs	○	○	○
85		Program protect		●	●	●
86		Password function		●	●	●
87	Playback		●	●	●	
88	Setting and display	Main menu screen		●	●	●
89	Data input / output	Fast data server		○	○	○
90		External data input		●	●	●
91		Memory card input / output		●	●	●
92		USB memory input / output		●	●	●
93	Automatic data backup		●	●	●	
94	Interface function	Embedded Ethernet		●	●	●
95		Fast Ethernet		○	○	○
96	Others	Display unit	10.4" color LCD	●	●	●
97		Display unit	15" color LCD	○	○	○
98		Robot interface with PMC I/O module		○	○	○
99		Robot interface with PROFIBUS-DP		○	○	○

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

**SIEMENS
S828D**

NO.	Division	Item	Spec.	S828D	
				Lynx 2100 series	
1		Controlled axes R: Milling spindle	2 axis	X, Z, SP	
			M-type	X, Z, C, R	
			S-type	X, Z, C, C2, B	
			MS-type	X, Z, C, R, C2, B	
2	Control axes	Simultaneously controlled axes	Positioning (G00) / Linear interpolation (G01) : 3 axes Circular interpolation (G02, G03) : 2 axes	●	
3		Backlash compensation		●	
4		Leadscrew error compensation		●	
5		Measuring system error compensation		●	
6		Feedforward control	velocity-dependent	●	
7		Follow up mode		●	
8		Programmable acceleration		●	
9		Emergency stop / overtravel		●	
10		Least command increment	0.001mm (0.0001 inch)	●	
11		Least input increment	0.001mm (0.0001 inch)	●	
12		Maximum commandable value	±99999.999mm (±3937 inch)	●	
13		Machine lock		●	
14		Absolute encoder		●	
15		Interpolation & Feed function	Reference point return	G75 FP=1	●
16			2nd reference point return	G75 FP=2	●
17	3rd / 4th reference return		G75 FP=3, 4	●	
18	Linear interpolation		Max. 4	●	
19	Circular interpolation		G02, G03	●	
20	Inverse time feedrate		G93	●	
21	Helical interpolation			●	
22	Universal interpolator NURBS			●	
23	Spline interpolation (A, B and C splines)			○	
24	Dwell		G04	●	
25	Feedrate / Rapid override		0 - 120 %	●	
26	Separate path feed for corners and chamfers			●	
27	Manual handle feed (1unit)		Portable manual pulse generator	●	
28	Reposition			●	
29	Acceleration with Jerklimitation			●	
30	Spindle function	Spindle speed override	50 - 120 %	●	
31		Spindle speed limitation		●	
32		Retraction for rigid tapping		●	
33		Rigid tapping		●	
34	Tool function	Tool radius compensations in plane			
35		● With approach and retract strategies		●	
36		● With transition circle / ellipse on outer edges		●	
37		Number of tools / cutting edges in tool list		256 / 512	
38		Tool length compensation		●	
39		Operation with tool management		●	
40		Tool list		●	
41		Replacement tools for tool management		○	
42		Monitoring of tool life and workpiece count		●	
43		Manual measurement of tool offset		●	
44		Loading and unloading of tools		●	
45		Programming & Editing function	Number of subroutine passes ≤ 9999		●
46	Number of levels for skip blocks 1			●	
47	Number of levels for skip blocks 8			○	
48	Polar coordinates			●	
49	1 / 2 / 3-point contours			●	
50	Dimensions metric / inch, changeover manually or via program			●	
51	Program functions				
52	● Dynamic preprocessing memory FIFO			●	
53	● Look ahead number of blocks			1	
54	● Frame concept			●	
55	● Inclined-surface machining with swivel cycle			●	
56	● Axis / spindle replacement			●	

NO.	Division	Item	Spec.	S828D
				Lynx 2100 series
57		• Geometry axes, switchable online in the CNC program		●
58		• Program preprocessing		●
59		Online ISO dialect interpreter		●
60		Program / workpiece management		
61		• Parts programs on NCU, max. number		300
62		• Workpieces on NCU, max. number		100
63		• On additional plug-in CF card		●
64		• On USB storage medium (e.g. disk drive, USB stick)		●
65		• On network drive		○
66		Settable offsets, max. number	G54, G55, G56 ...	100
67		Program editor		
68		• Programming support for cycles program(Program Guide)		●
69		• CNC editor with editing functions: Marking, copying, deleting		●
70		• Programming graphics / free contour input (contour calculator)		●
71		• Support for parameter input Animated Elements		●
72		• ShopTurn / ShopMill Machining step programming		●
73		Technology cycles for drilling/milling		●
74		Pocket milling free contour and islands stock removal cycle		●
75		Residual material detection		●
76		Access protection for cycles		●
77		Programming support can be extended, e.g. customer cycles		●
78		2D simulation		●
79		3D simulation, finished part		●
80		Simultaneous recording		●
81		JOG		
82		• Handwheel selection		●
83		• Switchover: inch / metric		●
84		• Manual measurement of zero / work offset		●
85		• Manual measurement of tool offset		●
86		• Automatic tool/workpiece measurement		●
87		• Reference point approach, automatic / via CNC program		●
88		Automatic		
89		• Execution from USB or CF card interface on operator panel front		●
90		• Execution from HMI memory on NCU CF card		-
91		• Execution from network drive		○
92		Operating software languages		
93		• Ch_S,Ch_T, En, Fr, Gr, It, Kr, Pt, Sp		●
94		• Additional languages, use of language extensions		●
95		Working area limitation		●
96		Limit switch monitoring		●
97	Operation, setting & Display, etc	Software and hardware limit switches		●
98		Position monitoring		●
99		Standstill (zero-speed) monitoring		●
100		Clamping monitoring		●
101		2D / 3D protection zones		●
102		Contour monitoring		●
103		Axis limitation from the PLC		●
104		Alarms and messages		●
105		Action log can be activated for diagnostic purposes		●
106		PLC status		●
107		Remote Control System (RCS) remote diagnostics		
108		• RCS Host remote diagnostics function		○
109		• RCS Commander (viewer function)	RCS Commander for PC/PG on CD-ROM	●
110		Integrated service planner for the monitoring of service intervals		●
111		Automatic measuring cycles		○
112		Easy Extend		●
113		Contour handwheel		●
114		Integrate screens in SINUMERIK Operate with SINUMERIK Integrate Run MyScreens		●
115	Cross-mode actions (ASUPs and synchronized actions in all operating modes)		●	

Product Preview

Basic information


Basic Structure
Cutting
Performance

Detailed
Information

Options
Applications
Diagrams
Specifications

Customer Support
Service

Responding to Customers Anytime, Anywhere

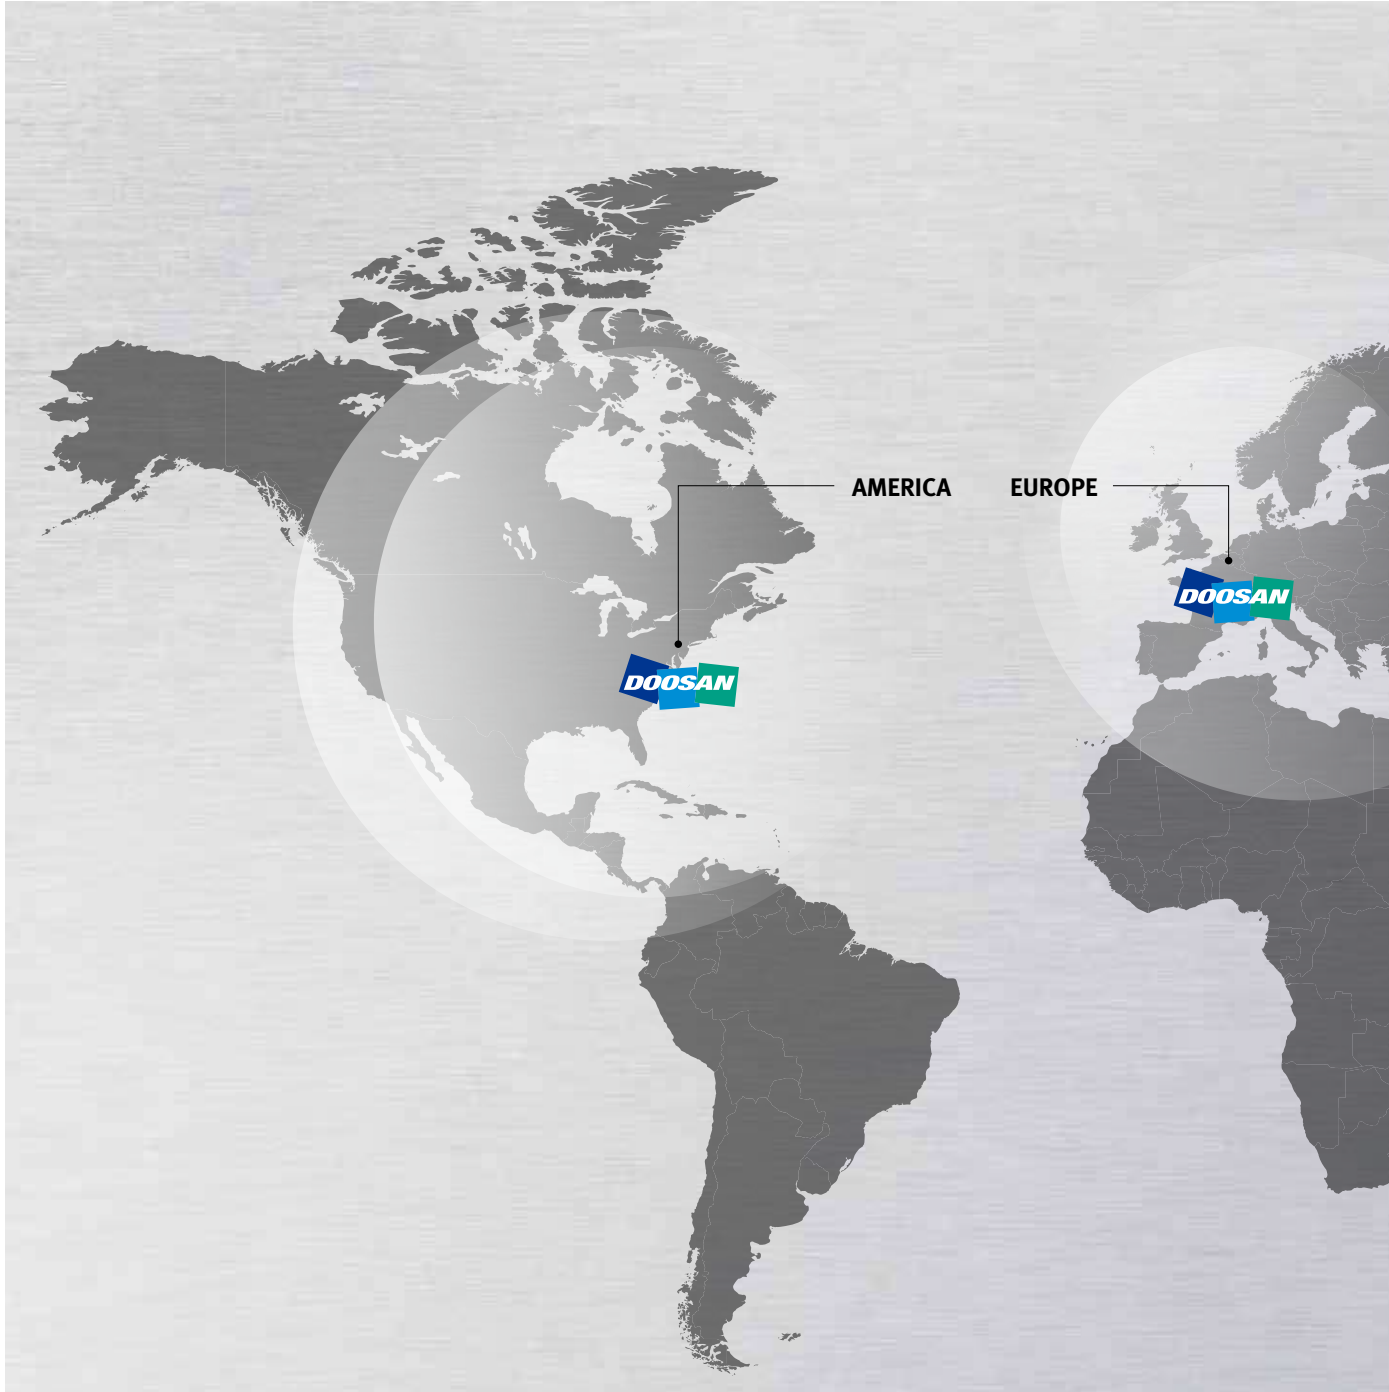

Global Service Support Network

Corporations

5

Dealer Networks

122

Technical Centers

18

Factories

3

Technical Center: Sales Support, Service Support, Parts Support

Doosan Machine Tools' Global Network, Responding to Customer's Needs nearby, Anytime, Anywhere

Doosan machine tools provides a system-based professional support service before and after the machine tool sale by responding quickly and efficiently to customers' demands. By supplying spare parts, product training, field service and technical support, we can provide top class support to our customers around the world.



Domestic Service Support Network

Integrated Support Centers	2	Sales Branch Offices	7	Post-Sales Service Centers	6	Designated Repair Service Centers	31
----------------------------	---	----------------------	---	----------------------------	---	-----------------------------------	----

Customer Support Service

We help customers to achieve success by providing a variety of professional services from pre-sales consultancy to post-sales support.

Supplying Parts



- Supplying a wide range of original Doosan spare parts
- Parts repair service

Field Services



- On site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair

Technical Support



- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy

Training



- Programming / machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering

Major Specifications

Lynx 2100 series



Description	Unit	Lynx 2100 [L]	Lynx 2100M [LM] [LMS]
Max. turning dia.	mm (inch)	Ø350 (Ø13.8)	Ø300 (Ø11.8)
Max. turning length	mm (inch)	330 [550] (13.0 [21.7])	290 [510] [510] (11.4 [20.1] [20.1])
Standard chuck size	inch	6 / 8	
Max. spindle speed	r/min	6000 / 4500	
Max. spindle power	kW (Hp)	15 (20.1)	
NC system	-	DOOSAN FANUC i / SIEMENS 828D	



Doosan Machine Tools

<http://www.doosanmachinetools.com>

www.facebook.com/doosanmachinetools

Optimal Solutions for the Future

Head Office

Yeonkang Bldg., 6th FL., 270, Yeonji-dong,
Jongno-gu, Seoul, Korea
Tel +82-2-3670-5345 / 5362
Fax +82-2-3670-5382

Doosan Machine Tools China

Room 101,201,301, Building 39 Xinzhuang Highway
No.258 Songjiang District, China Shanghai(201612)
Tel +86 21-5445-1155
Fax +86 21-6405-1472

Doosan Machine Tools Japan

#2412, Mita Kokusai Bldg. 1-4-28 Mita,
Minato-ku, Tokyo 108-0073, Japan
Tel +81 3 5730 9013
Fax +81 3 5730 9016

Doosan Machine Tools America

19A Chapin Rd., Pine Brook, NJ 07058, U.S.A.
Tel +1-973-618-2500
Fax +1-973-618-2501

Doosan Machine Tools Europe

Emdener Strasse 24, D-41540 Dormagen, Germany
Tel +49-2133-5067-100
Fax +49-2133-5067-001


Doosan Machine Tools India

106 / 10-11-12, Amruthahalli, Byatarayanapura,
Bellary road, Bangalore-560 092, India
Tel +91-80-4266-0122 / 121 / 100



* For more details, please contact Doosan Machine Tools.

* The specifications and information above-mentioned may be changed without prior notice.

* Doosan Machine Tools Co., Ltd. is a subsidiary of MBK Partners, a Korean private equity firm. The trademark  DOOSAN is used under a licensing agreement with Doosan Corporation, the registered trademark holder.